



VEILUX[®]

The Art of Surveillance

**SVR-1648D1
USER MANUAL**

SVR-1648D1

FCC Compliance Statement

Model Name:

SVR-1648D1

This device complies with Part 15 of the FCC Rules. Operation is Subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operations.

WARNING

Unauthorized reproduction of all or part of this manual is strictly prohibited.

The figures in this manual are for illustration purposes only (may differ from the actual product).

The specifications and design of the product are subject to change without prior notice for purposes of quality improvement.

CAUTIONS

To get the best use out of the product, be sure to read the cautions before using the product. For safety, please take note of the following.

Instructions before using the product

- 1 To prevent electric shock when installing, moving, or opening the DVR and peripheral devices, connect and disconnect the cables as instructed. All cables must be connected to grounded power outlets.
- 2 If the product is installed near a power outlet, make sure it can be unplugged easily.
- 3 Do not use the DVR in water or in wet places.
- 4 Keep the plastic packing materials used for the DVR or other peripheral devices out of reach of children (may cause suffocation).

Installation Environment of the DVR

- 1 Maintain the following conditions: operating temperature of 5°C ~ 40°C; operating humidity of 10% ~ 80%.
- 2 Install the DVR in a safe place that is free from external vibration.
- 3 Install the DVR in a well-ventilated place.
- 4 To protect the hard disk from data loss and breakdown, install the DVR away from magnetic materials.
- 5 When using a rack other than the standard one, use a separate table with sufficient spacing, i.e., 60cm from the floor, 50cm from the ceiling, and 20cm from the side and back walls and other objects.





Safety Notes on the DVR

- 1 When installing additional boards and HDD, separate the power cable and turn OFF power supplied to the DVR completely.
- 2 Keep the product away from heat-generating devices such as heaters.
- 3 Do not use a damaged power cord.
- 4 To prevent problems due to magnetic interference and electric surge, use only grounded cables and power outlets.
- 5 If the power cord is connected, do not touch the power unit. If the power cord is connected, electric current is still flowing internally even after the switch is turned OFF.
- 6 Do not place a heavy object on top of the product.
- 7 Do not drop a conductive object in the ventilation holes.
- 8 Allot sufficient space for system cabling.
- 9 Use only the parts indicated in the manual. Do not disassemble, repair, or modify the product without permission.
- 10 Incorrect system setup may cause malfunction.
- 11 Shut down the system normally as instructed in the manual.

Safety Notes on the Lithium Battery

- 1 Replace lithium batteries as instructed to avoid danger.
- 2 Dispose used lithium batteries properly.

【Warning and Caution are indicated as follows.】

	Possible injury or product damage.
	Risk of minor injury or product damage.
	Cautions for the usage of the product.
	Information for the usage of the product.

Chapter 1 . Introduction	7
1 - 1 SVR-1648D1 Major Features	7
1 - 2 Components	8
1 - 3 SVR-1648D1 Product Introduction	9
Chapter 2 . Installation and connection	10
2 - 1 SVR-1648D1 Names and Features of Each Part	10
2-1-3 SVR-1648D1 Rear Panel	10
2 - 2 Installation and Connection	11
2-2-1 Basic Connection	12
2 - 3 Connection of Other Devices.....	13
Chapter 3 . Operation and Setup Tools	15
3 - 1 SVR-1648D1 Front Panel Button	15
3 - 2 SVR-1648D1 Remote Controller	16
3 - 3 Mouse	17
3 - 4 Jog/Shuttle	17
Chapter 4 . DVR Operation Setup	18
4 - 1 SVR-1648D1 Storage Installation	18
4 - 2 Power ON.	20
4 - 3 HD frequency setting	20
4 - 4 Storage Setup	20
4 - 5 Recording Setup	20
4 - 6 Date/Time Setup	21
4 - 7 Camera / TV Setup	21
4 - 8 Screen View and Other Setup	21
4 - 9 External Device Setup	21
4 - 1 0 Recording View	21
4 - 1 1 Backup	21
4 - 1 2 DVR Information View	21
Chapter 5 . System Operation	22
5 - 1 Real Time Monitoring Mode and Icon	22
5 - 2 System Login	23
5-2-1 User Account and Authorization.....	23
5-2-2 Login	23
5-2-3 Logout.....	24
5 - 3 Monitoring	24
5-3-1 Screen Division and Auto Sequence	24
5-3-2 Channel Grouping	25
5-3-3 Spot	25
5-3-4 Menu in Monitoring Mode	26
5-3-5 Zoom	26
5-3-6 Screen Control by using PTZ	27
5 - 4 System Information and Screen Setup Change	28
5-4-1 System Information	28
5-4-2 Screen Brightness/Contrast/Color/Saturation/Sharpen/Camera Adjustment	28
5-4-3 Display Setting	29
5 - 5 Control	29

5-6 Search	30
5-6-1 Search Mode	30
5-6-2 Playback Menu	30
5-7 Calendar Search	31
5-7-1 Search Mode	31
5-7-2 Year/Month/Day Selection	31
5-7-3 Time Index	31
5-7-4 Event	31
5-7-5 Multi-Channel Search	31
5-7-6 Multi-Time Search	32
5-7-7 Multi-Day Search	32
5-8 Playback	32
5-8-1 Playback and Playback Speed Control	33
5-8-2 Smart Search	34
5-8-3 PCD Search	35
5-8-4 Calendar Search	35
5-8-5 MULTI TIME	35
5-8-6 MULTI DAY	35
5-8-7 MULTI CHANNEL	35
5-8-8 Panorama Play	35
5-8-9 Event	36
5-8-10 Audio	36
5-8-11 Backup	36
5-8-12 Screen Mode	36
5-9 Log Viewer	36
5-9-1 Log Type	36
5-9-2 System Log Viewer	37
5-10 Recording	37
5-10-1 Recording Types	37
5-10-2 Recording Setup	37
5-10-3 Recording Status View	38
5-11 Backup	38
5-11-1 Backup in The Real-Time Monitoring Mode	38
5-11-2 Backup in Search Mode	38
5-11-3 Backup in Log Mode	39
5-11-4 Backup in Playback Mode	39
5-11-5 Common Backup Procedure	39
5-12 Setup Backup	40
5-13 Log Backup	41
5-14 Print	41
5-15 NAS Backup	41
5-16 Snapshot	42
Chapter 6. Setup	43
6-1 Time	43
6-1-1 Time Sever	43
6-1-2 Date and Time	44
6-1-3 Standard Time Zone	44
6-2 Definition	45
6-2-1 Camera	45
6-2-2 POS	45
6-2-3 Event Source	45
6-2-4 Relay	46
6-3 Action	46
6-3-1 Schedule Selection (Schedule1 ~ Schedule4)	47
6-3-2 Event	47
6-3-3 Recording	47

6-3-4 Alarm	48
6-3-5 Duration	48
6-3-6 Log	48
6-3-7 Advanced	48
6-4 Schedule	48
6-4-1 Schedule Setup.....	49
6-5 Storage	49
6-5-1 Max. Recording Days	49
6-5-2 HDD Overwrite.....	49
6-5-3 Local Storage Management	50
6-6 Network	53
6-6-1 Ethernet	53
6-6-2 DDNS	53
6-6-3 Port	54
6-6-4 E-mail	54
6-6-5 Bandwidth	54
6-6-6 Callback	54
6-7 System	55
6-7-1 DVR Name	55
6-7-2 ID for Remote Controller	55
6-7-3 ID For Keyboard Controller	56
6-7-4 User Registration	56
6-7-5 Admin. Password	56
6-7-6 Upgrade	56
6-7-7 Factory Default	57
6-7-8 RS232C Port	58
6-7-9 Alarm	58
6-7-1 0 Alarm Duration	58
6-7-1 1 Menu Time Out	58
6-7-1 2 Language	58
A/P/P/E/N/D/I/X	59
(1) Recommended HDD Specification	59
(2) Recommended PTZ Camera Protocol	59
(3) Recommended USB2.0 Device	59

Figure List



[Figure 2-2. SVR-1648D1 Basic Connection and Device Connection]	12
[Figure 4-5. Menu Window]	20
[Figure 5-7. Recording Status Window]	22
[Figure 5-8. Login Window]	23
[Figure 5-9. Big / Biggest Channel Mode]	24
[Figure 5-10. SVR-1648D1 Channel Mode]	24
[Figure 5-12. Spot]	26
[Figure 5-13. Zoom Control Screen]	26
[Figure 5-14. PTZ Setup]	27
[Figure 5-15. PTZ Control]	27
[Figure 5-16. PTZ Control Min./Max.]	28
[Figure 5-17. Product Information Window]	28
[Figure 5-18. Screen Setup Window]	29
[Figure 5-19. Display Setting Window]	29
[Figure 5-20. Audio]	30
[Figure 5-21. Relay]	30
[Figure 5-22. Text]	30
[Figure 5-23. Playback Menu]	30
[Figure 5-24. Search Window]	31
[Figure 5-25. Playback Screen]	32
[Figure 5-26. Playback Status and Control Window]	33
[Figure 5-27. Playback Menu]	34
[Figure 5-28. Smart Search Area Designation]	34
[Figure 5-29. Smart Search Motion Detection Window]	35
[Figure 5-30. Panorama Playback]	35
[Figure 5-31. Display Mode]	36
[Figure 5-32. Log View]	36
[Figure 5-33. Move to the log list of the certain time zone in Log View]	37
[Figure 5-34. Backup Window]	39
[Figure 5-35. Backup and Sub-menu Setup Backup]	40
[Figure 5-36. Setup Upgrade]	40
[Figure 5-37. Log Backup]	41
[Figure 5-38. Setup / Time Menu]	43
[Figure 5-39. Setup / Definition Menu]	45
[Figure 5-40. Motion Area Setup]	46
[Figure 5-41. Setup / Action]	46
[Figure 5-42. Pop up Alarm]	48
[Figure 6-43. Schedule Window]	48
[Figure 6-44. Storage Window (Local)]	49
[Figure 6-45. Storage Format Procedure]	52
[Figure 6-46. Setup Network Window]	53
[Figure 6-47. System Setup Window]	55
[Figure 6-48. Firmware Upgrade Progressing Window]	57



		SVR-1648D1
System	Reliable Standalone DVR	
Format	16Ch – D1 480/400	
OS	Embedded Linux - Built in Flash Memory	
Video Input	6 BNC	
Video Output	Monitor	1 BNC, 1 VGA, 1 HDMI
	Loop	16 BNC
	Spot	4 BNC - Single or Quad
Audio Input	Line Input : 16 RCA	
Audio Output	Line Output : 1 RCA	
Compression Format	[Video : Standard H.264] / [Audio : G.723]	
Recording Speed	1/8, 1/4, 1 ~ 30(25)fps, Total max. D1 480/240(400/200)fps	
Recording Resolution	CIF, 2CIF, 4CIF	
Recording mode	Continuous, Event (Sensor, Motion, Audio, Pattern, Text), Schedule	
Alarm Interface	16 Sensor Input, NC/NO - Terminal Block 4 Relay Output, NC/NO - Terminal Block	
Video Output Resolution	HDMI : Full HD(1920x1080), WSXGA+(1680x1050), SXGA(1280x1024) VGA : WSXGA+(1680x1050), SXGA(1280x1024) BNC : SDTV(720x480(576))	
POS / ATM Interface	8 RS232C Simplex - Terminal Block	
Backup & Copy Access	eSATA, DVD-RW, USB2.0, Network	
Network Access	Ethernet 10/100/1000 - RJ45	
PTZ / Controller Access	RS485 Half Duplex - Terminal Block	
Internal HDD / Internal ODD	SATA HDD Max. 6ea / SATA Type DVD 1ea	
System Operation & Adjustment	Front Panel Button, Jog/Shuttle, Mouse, IR Remote Control, Keyboard Controller, Network	
System Upgrade	USB2.0 Memory Stick, Network	
Network	System Automation (Controlled by CMS)	
	NTP Supported	
	CMS / Monitoring by Web Browser / PDA	
Others	17 Languages Supported, Automatic E-mail	
	90 ~ 250V, 50/60Hz , 80 Watts / Operating Temperature [5 ~ 40 °C] Weight without HDD [8kg] / Dimension [440 x 88 x 430 mm]	

1 - 2 Components

After unpacking the product, check whether following accessories are included.

- Remote Controller
- CD (CMS, CMS Manual, PDA Viewer software)
- AAA 1.5V Batteries 2ea
- Power code D1 Models
- User Manual
- Handle

1 - 3 SVR-1648D1 Product Introduction




- D1(4CIF) real-time recording
- 16Ch audio recording
- 4Ch spot output (SVR-1648D1)
- Various video output port (HDMI, VGA, BNC)
- Various video output mode (Full HD, WSXGA+, SXGA, SDTV)
- 6 HDD bay
- Jog-shuttle
- 8Ch POS/ATM interface
- Pre-alarm recording
- Watermarking & watermarking detection
- Auto e-mailing notification max. 5 users
- Privacy zone mask
- Covert channel
- Digital single/multi-zoom
- Smart search
- Pattern change / Text detection/search
- Multi-time/day, Index (event) search/playback
- Panorama playback
- Data backup to NAS over ethernet
- Still image capture Full HD resolution
- Direct printer connection through USB2.0
- Firmware upgrade at a remote PC site
- Remote setup, backup, relay control
- USB/DVD backup with self-executable player (quick viewer)
- Web monitoring in PC (Built in web server)
- PDA viewer (Windows mobile)
- Mobile web viewer (3G viewer)
- NTP, DST, DDNS, DHCP

Chapter 2 . Installation and connection


2-1 SVR-1648D1 Names and Features of Each Part

2-1-3 SVR-1648D1 Rear Panel

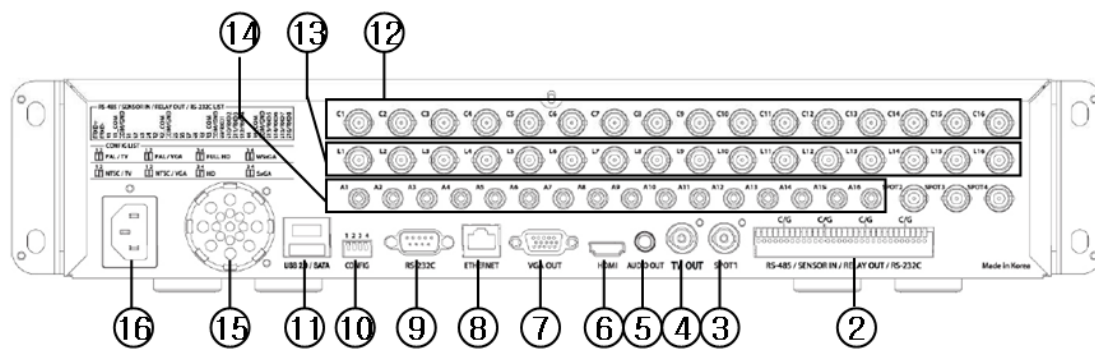

No.	Name	Feature	Type
1	TERMINAL BLOCK	RS-485 / SENSOR IN / RELAY OUT / RS-232C	Terminal Block
2	SPOT	CCTV monitor connection to output images of the channel generating an event signal	BNC
3	TV OUT	CCTV monitor connection	BNC
4	AUDIO OUT	Audio Output Connection(Line Only Output)	RCA
5	HDMI	HDMI Output HDMI type-C	
6	VGA-OUT	VGA Monitor or LCD Monitor Connection	D-SUB 15P
7	Ethernet	ADSL, Cable Modem, Ethernet 10/100 Base-T, Network Connection	RJ-45
8	RS-232C	Console Output	D-SUB 9P
9	CONFIG	NTSC/PAL VGA/TV Full HD(1920x1080), HD(1920x1080) WSXGA+(1680x1050), SXGA(1280x1024)	DIP S/W, 4-pin
10	USB2.0 / e-SATA	D1- series	e-SATA
11	CAMERA IN	Video Camera Connection	BNC
12	LOOP OUT	Video Signal loop-back Output Connection	BNC
13	AUDIO IN	Audio Input Connection	RCA
14	VENTILATING OPENING	(D1-series)	Power Supply Fan
15	POWER	90 ~ 250V, 59/60Hz, 80 Watts	AC Inlet

2 - 2 Installation and Connection

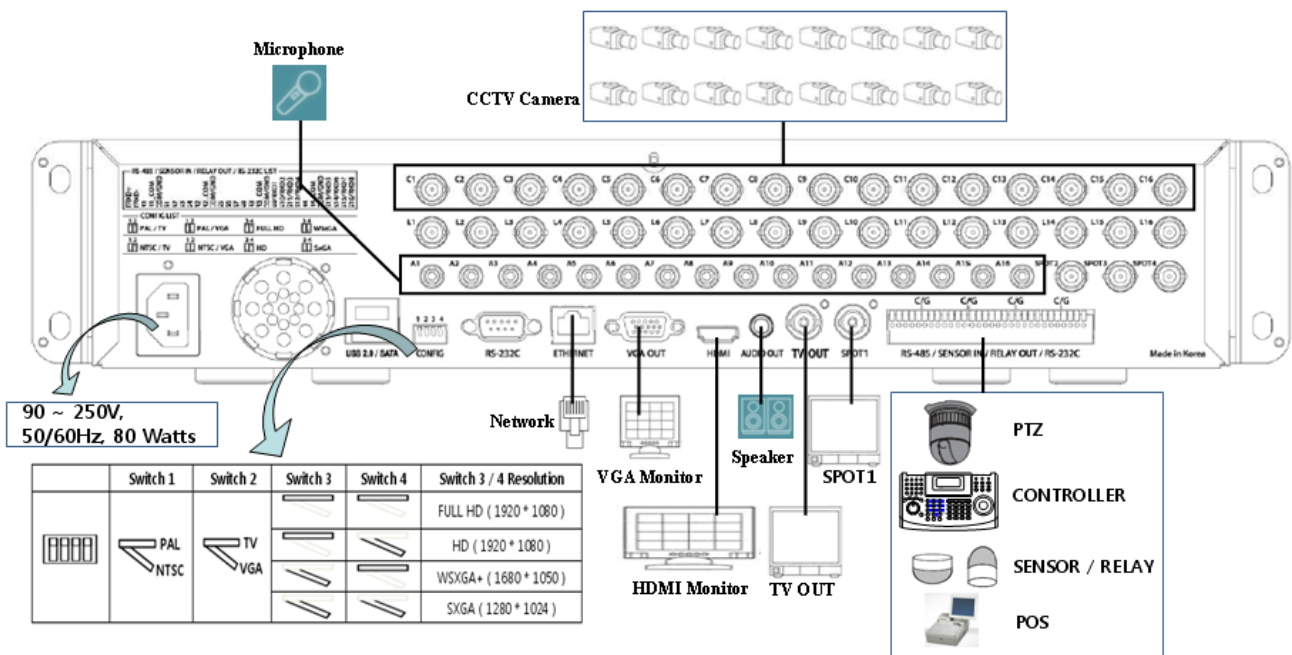












[Figure 2-2. SVR-1648D1 Basic Connection and Device Connection]


2 - 2 - 1 **Basic Connection** ※ By referring to above [Figure 2-1] ~ [Figure 2-2],

make a connection accordingly.

Connection Order	Connection Device	DVR Terminal
1	CCTV Camera	Rear Panel Video IN_
2	CONFIG SWITCH Setup	Rear Panel Left 4ea Switch (Refer to below; CONFIG SWITCH Setup)
3	CCTV Monitor	Rear Panel TV
4	VGA Monitor / LCD Monitor	Rear Panel VGA-OUT
5	HDMI Monitor	Rear Panel HDMI
6	Mouse	Rear Panel USB

CONFIG SWITCH Setup

	Switch 1	Switch 2	Switch 3	Switch 4	Switch 3 / 4 Resolution
					FULL HD (1920 * 1080)
					HD (1920 * 1080)
					WSXGA+ (1680 * 1050)
					SXGA (1280 * 1024)

	<p>※ In the TV mode, GUI is not displayed through VGA/HDMI output but only a channel title is shown.</p> <p>※ Only VGA is available in higher than the HD mode.</p>
---	---

2-3 Connection of Other Devices



D1 series has differences in feature as described below. Be cautious.

Item	SVR-1648D1
Internal HDD Bay	6 SATA
Spot	4/1 BNC - Single or Quad

Item	SVR-1648D1
Audio	16
Sensor	16
Relay	4
POS	8

Connect the PTZ controller cable, audio input/output, network, and sensors as shown below.

	Connecting Device	DVR Terminal
1	SPOT Monitor(CCTV Monitor)	Rear Panel SPOT
2	Mike / Speaker	Rear Panel Audio Input / Audio Output
3	LAN Cable	Rear Panel Ethernet
4	PTZ Camera	Rear Panel Terminal Block
5	Sensor / Relay / POS	Rear Panel Terminal Block
6	Keyboard controller	Rear Panel Terminal Block


1) SPOT Monitor

Connect Spot Monitor to the rear SPOT terminal.
SVR-1648D1 supports 4ea SPOT terminals and

2) Audio Input/Output

SVR-1648D1 supports 16 audio inputs and 1 output

3) Terminal Block

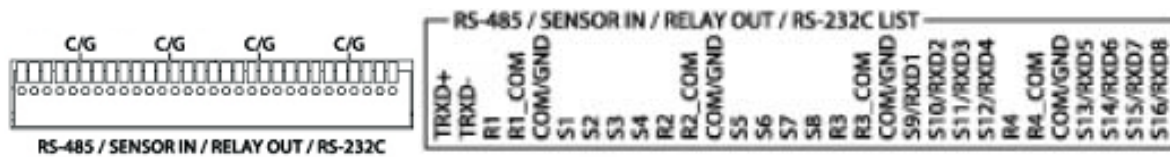

[Figure 2-3 . SVR-1648D1 series Terminal Block and Description]

The terminal blocks in the rear of the product are for the connection of PTZ / Sensor / Relay / POS Connection.
The number of the terminal block may be different depending on the model.

① PTZ Camera/Keyboard Controller

Connect PTZ control cable; TRX+, TRX- and GND to Terminal Block(TB1);No.4 TRXD+, No.5 TRXD- and No.10 GND in the rear of DVR. You may refer to APPENDIX for supported PTZ cameras in this manual. Keyboard controller has the same connection as PTZ camera.



PTZ Camera may not be working properly if GND is not connected.

② Sensor/Relay /POS

Connect Sensor/Relay/POS to the terminal block directly depending on the model.



Sensor and Relay Type

NC(Normal Close) : Normally closed; opens when a signal is received

NO(Normal Open) : Normally open; closes when a signal is received

(1) Sensor Connection

- ① Connect the sensor to the terminal block S1 ~ S16 depending on the model.
- ② Each input terminal is connected relatively with the channel number.

(2) Relay Connection

- ① Relay the output signal to external devices such as Alarm and Siren.
- ② Connect the relay to R1/R2/R3/R4 terminal block depending on the model

(3) POS Connection

- ① Connect the POS device.
- ② Connect the POS to Terminal Block RXD1 ~ RXD8 depending on the model.




The external alarm device may require the power supply depending on its type.
Be cautious.

Chapter 3 . Operation and Setup Tools


SVR-1648D1 can be controlled easily by using the front panel buttons, front panel, jog/shuttle, remote controller and mouse.

3 - 1 SVR-1648D1 Front Panel Button

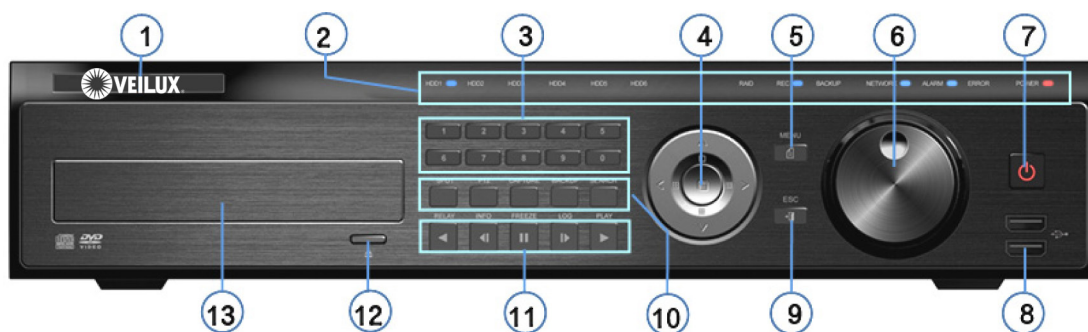

No.	Name	Function
1	Logo	Veilux
2	LED DISPLAY	HDD and System Power and Status Indication LED
3	Number Button	Channel Selection or Number Input
4	MOVE & DISPLAY & Select	Move from one category to another or change to the display mode or select
5	MENU	Various Modes
6	JOG & SHUTTLE	Speed in Playback Mode / Play Direction / Frame Play
7	POWER	Turn the system power ON or OFF
8	USB Port	Connection port to the USB mouse and USB memory stick
9	ESC	Exit the current menu or move to the upper menu
10	SPOT	Spot Control
	PTZ	PTZ Pan/Tilt/Zoom Control
	CAPTURE	Capture the displaying image into USB
	BACKUP	Save the recorded image at other media.
11	SEARCH	Search the recorded Image.
	Reverse Play / Fast Reverse RELAY	Backward Playback/Rewind (in the Playback Mode) Relay Control (in the Monitoring Mode)
	Reverse Frame by Frame STATUS	Backward Playback Frame by Frame (in the Playback Mode) View System Configuration (in the Monitoring Mode).
	Pause LOCK	Pause (in the Playback Mode) Lock (in the Monitoring Mode)
11	Forward Frame by Frame LOG	Playback Frame by Frame (in the Playback Mode) System Log View(in the Monitoring Mode)
	Forward Play / Fast Forward PLAY	Playback/Fast Forward (in the Playback Mode) Play back (in the Monitoring Mode)
12	Eject	CD, DVD Eject Button
13	ODD	CD-RW, DVD-RW

3 - 2 D1 series Remote Controller

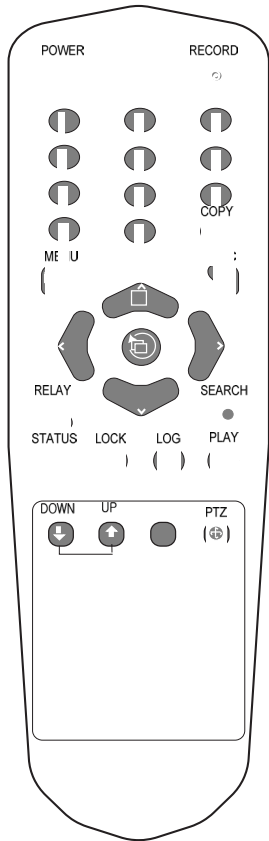

A) Basic Control Button

	POWER	Turn the system power ON or OFF.
	RECORD	Record all channels or stops recording all channels.
	NUMBER	Input of numeric data.
	ID	Set up the remote controller ID.

B) System Operation and Setup Button

	MENU	Data, Schedule, System Set up
	ESC	Exit the current menu or Move to the upper menu.
	SEARCH	Search recorded images.
	SELECT	Select the category or execute automatic screen conversion.
	COPY	Copy recorded videos.
	PTZ	Shift to the PTZ camera control mode.
	MOVE	Move from one category to another or change to the display mode.
	UP/ DOWN	Log Page Up/Down

C) Search Button (Playback Mode)

PLAY ()	Play / Fast Forward	Play/Fast-forward
LOG ()	Frame by Frame	Play forward frame by frame
LOCK 	Pause	Pause
STATUS	Reverse Frame by Frame	Reverse play frame by frame
RELAY	Reverse Play / Fast Reverse	Reverse play/ Rewind

D) Buttons for Other Features (Monitoring Mode)


PLAY ()	PLAY	Play the recorded images.
LOG ()	LOG	View the system log list.
LOCK 	LOCK	Lock the system
STATUS	STATUS	View system information and changes the display setup.
RELAY	RELAY	View the relay status and manual operation.
* Setting up the remote controller ID		



Example) When the remote controller ID is set to 1
 Press the **{ID}** button, enter **{0}** and **{1}**, and press the **{ID}** button again.
 To control all DVRs with the different ID, set the remote controller ID to 999.





3 - 3 Mouse

The mouse pointer as shown below appears if a mouse is connected to the USB terminal at the front panel.

	Mouse Control functions are shown below.	
	Click on the right button	Monitoring Mode / Move from Play Mode to Monitoring Menu / Pop up or remove Play Menu. Show sub-folder of the certain Menu window.
	Click on the left button	Select Menu.
	Double click on the left button	Select Menu.
	Click the left button and drag	Move a certain window.

3 - 4 Jog/Shuttle


In the playback mode, control the play direction, speed and frame.


Front	Side
<p>Speed and Direction Control</p>  <p>Frame Control</p>	
	<p>※ Play Direction Control This is available in the playback mode. Turning the jog right/left plays forward/reverse frame by frame.</p>
	<p>※ Speed and Direction Control This is available in the playback mode. Turning the jog right/left plays forward/reverse x1/x2/x4/x30.</p>

Chapter 4 . DVR Operation Setup

4-1 SVR-1648D1 Storage Installation

※ The recommended HDD specification are shown below

	Type	Size	Capacity	Buffer	RPM
	SATA I, II	3.5" 1, 2 Flat	Up to 1.5TB	over 8MB	over 7200

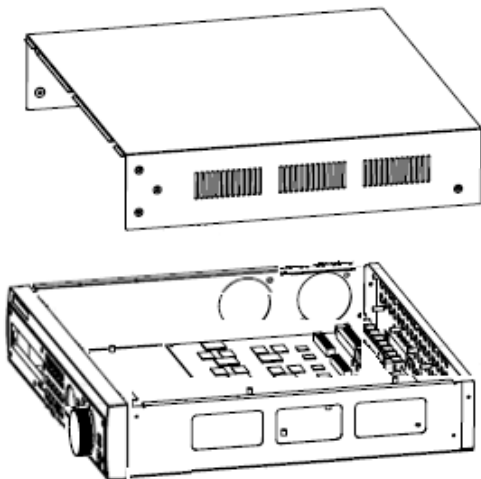


※ Step 1

1) Using a screw driver, unscrew and take off the top case of the product.




- 1) Normal termination of the system and fully unplugged power code are required before conducting HDD installation.
- 2) After installing HDD, Do not connect to power supply with the top case opened. The top case must be covered before usage.

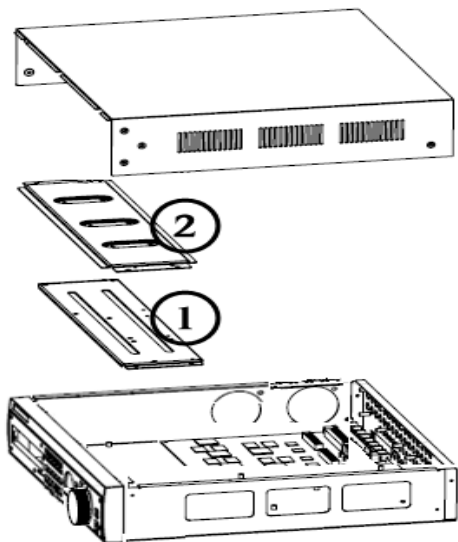

※ Step 2

- 2) Using a screw driver, unscrew the fixing bolt of the top HDD bay ② and separate the top HDD bay ② from the body.
- 3) Using a screw driver, unscrew the fixing bolt of the bottom HDD bay ① and separate the bottom HDD bay ① from the body.

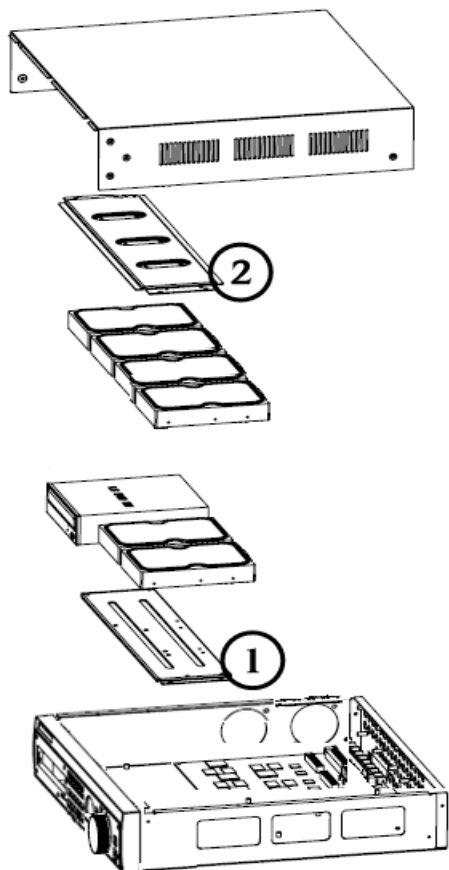

※ Step 3

4) Align screw holes and screw and fix HDD onto the bottom HDD bay①.


5) Align screw holes and screw and fix HDD onto the top HDD bay②

6) By reversing Step 2, combine both top② and bottom① HDD bay with the body.




※ Step 4

7) Connect the power cable and data cable to HDD.

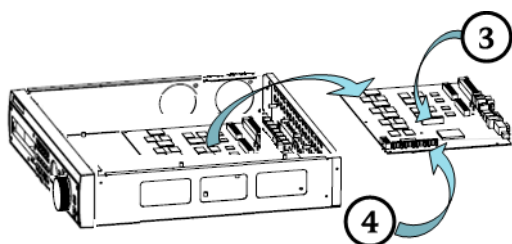

※ SVR-1648D1 model has a different type of SATA power cable.

9) Connect the HDD data cable into the mainboard data cable connector④).

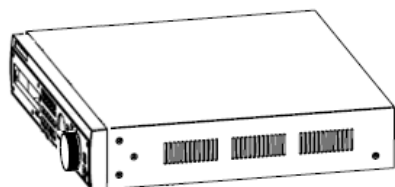

※ Step 6

10) Reassemble the top case by reversing 1) to finalizing HDD installation.



Indication of “{ }” refers to one provision of the menu. Indication of “ ” refers to a sub-provision.
Example> {Menu} {Setup} : go to Setup that is a sub-provision of Menu.

4 - 2 Power ON.

- ① SVR-1648D1(90 ~ 250V, 50/60Hz) and connect the power.
- ② Booting will be initiated by pressing the power button in the front panel.
- ③ After booting is finished, the live screen and channel indication / clock are shown.
- ④ Menu widow pops up by clicking the right button of the mouse or pressing [MENU] button in the front panel as shown below.



[Figure 4-5. Menu Window]



ID and Password are required for initial installation. Default ID and Password are shown below.

[Local Admin : 00000] [User1 : 1111111] [User2 : 2222222]

[User3 : 3333333] [User4 : 4444444]

※ Password change is available at {Menu} {Setup} {System} {Admin Password}.

4 - 3 HD frequency setting

HD series supports HD monitors through HDMI output.



60Hz setting as below will be required if video output in PAL area is not in regular.



[Figure 4-6. HD frequency]

4 - 4 Storage Setup

- ① Select {Menu} {Setup} {Storage} and configure HDD.



For more detail about HDD and external devices, check [6-5 Storage].

4 - 5 Recording Setup

- ① Select {Menu} {Setup} {Action} {Recording}.
- ② Setup [Recording Resolution]/[Recording Quality]/[Normal Speed]/ [Event Speed]/[Audio]/[Text].



The initial recording setup is **[Recording Resolution: CIF] [Recording Quality: High] [Recording Mode: Continuous]**. An image of the connected cameras is recorded with above setting. For more detail, check **[6-3 Action]**.

4 - 6 Date/Time Setup

- ① Select {Menu} {Setup} {Time}.
- ② Configure [Time Server]/[Date and Time]/[Standard Time Zone].

4 - 7 Camera / TV Setup

- ① Select {Menu} {Setup} {Camera} {Adjust}.
- ② Set up for [Brightness/Contrast/Color/Hue/Camera Adjustment/TV OUT Adjustment] are available.

4 - 8 Screen View and Other Setup

- ① Select and set up {Menu} {Miscellaneous} {Screen View}.
- ② Select and set up {Menu} {Miscellaneous} {Channel Group}.

4 - 9 External Device Setup

- ① Configure external devices. For more information, check [2-3 Connection of other devices], [Chapter 5. System Operation], [6-2 Definition], [6-6 Network], [6-7 System].

4 - 1 0 Recording View

- ① For more information, check [5-6 Search], [5-7 Calendar Search], [5-8 Playback], [5-10 Recording].

4 - 1 1 Backup

- ① Backup is available in Monitoring, Search, Log and Playback Mode.
- ② For more information, check **[5-11 Backup]**.

4 - 1 2 DVR Information View

- ① Move to {Menu} {Miscellaneous} {DVR Info}.




Detail information for product functions are described below in this manual.

Chapter 5 . System Operation

5 - 1 Real Time Monitoring Mode and Icon

After booting is finished, Audio/Recording Status/Channel Title/Connection Status/Time/HDD Status are displayed as shown below.

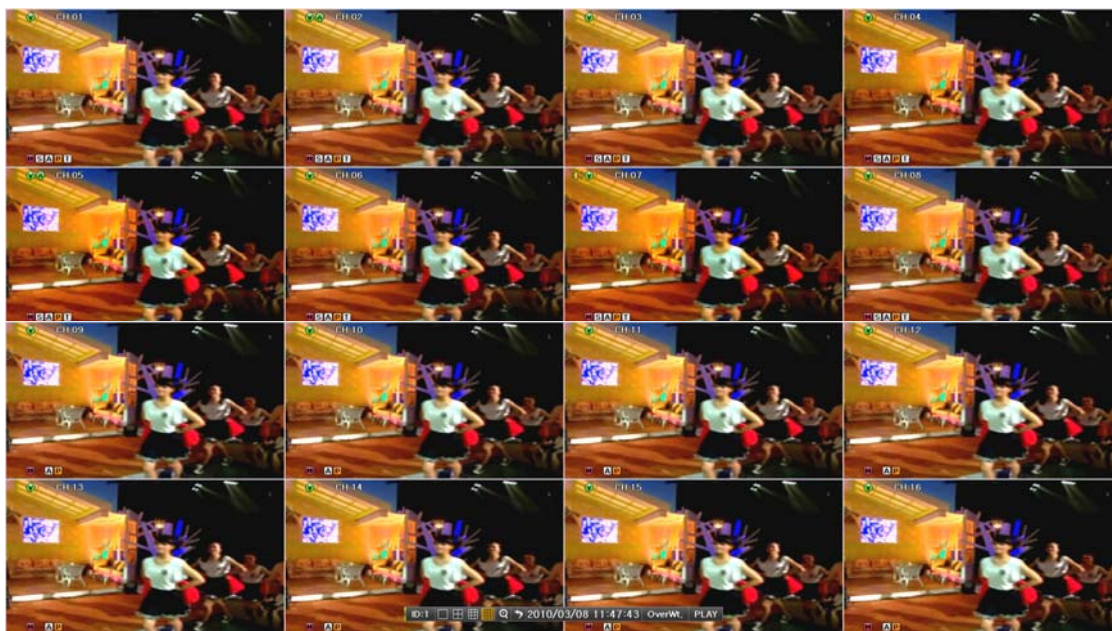


[Figure 5-7. Recording Status Window]

※ Recording Event / Recording Mode Icon ※		
Recording Event		Motion Detection Recording
		Sensor Recording
		Audio Recording
		Pattern Change Recording
		Text Recording
Recording Mode		Video Recording
		Audio Recording
		Text Recording

※ Recording Event Icons are still displayed despite of the recording stop. Recording Mode Icon distinguish recording status.

※ Live Screen Icon ※	
	Video is not connected or Video is covert.
	Audio is set activated.
	Audio is set silent.
No Signal	Camera has been disconnected.

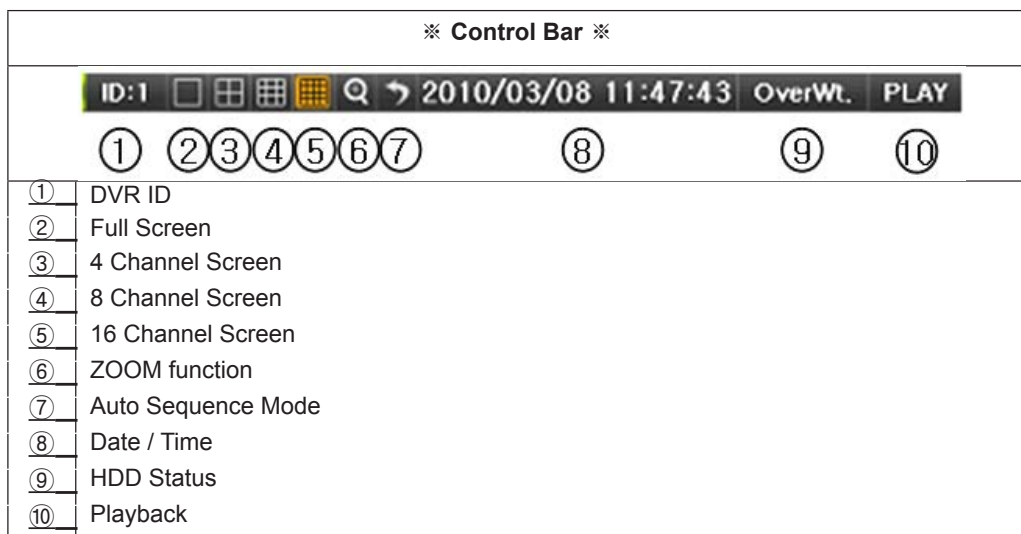

5 - 2 System Login

5 - 2 - 1 User Account and Authorization


System users are divided into local administrators and general users and the local administrator can use all functions.

Local Admin	The local administrator can use all functions: System Power On/Off, Setup, Monitoring, and Playback .(remote access is not available, however)
User	Up to four users are allowed. Each user can access the functions depending on the given authorities. For Authorization Setup, Move to {Menu} {Setup} {System} {4. User Registration} .

※ Functions available for Authorization Setup	
Network Live	View the real-time image by network access.
Playback	View the recorded image.
Copy (Download)	Copy and download the image from the network.
PTZ Control	PTZ camera control
Setup	Recording, Recording Schedule, System, Storage, Time, PTZ, Network Setup, Screen Setup
Network Upgrade	Remote network upgrade
View Covert Channels	Enable viewing covert channels.

5 - 2 - 2 Login

For security purpose, user must log in first to use **{Monitoring Menu}**.

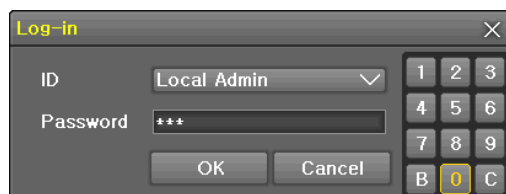

[Figure 5-8. Login Window]

- ① On the real-time monitoring window, select **{Menu} {Login}**.
- ② Enter the password or select the cancel.

5-2-3 Logout

After logging out, the user cannot use {Menu}.

- ① On the real-time monitoring screen, select {Menu} {Logout}.


5-3 Monitoring

SVR-1648D1 features powerful monitoring functions as shown below.

- 1 / 4 / 9 / Big / 16 / Biggest Division Mode and Auto Sequence Mode
- Channel Grouping
- SVR-1648D1 (4) Menu Controlling in Monitoring Mode
- Zoom
- Live Event Indication
- Text Detection by using POS
- Screen Control by using PTZ.

5-3-1 Screen Division and Auto Sequence

After the system is booted, images will be displayed on a screen divided into [16/9]division depending on the model. Except for the basic setting, the system follows user's setting on the screen division from next booting. D1 series provides the 7 screen division mode including 1 / 4 / 9 / Big / 16 / Biggest / Auto Sequence and 1/4/9/16 are **Basic Mode** and Big/Biggest/Auto Sequence are **Special Mode**.

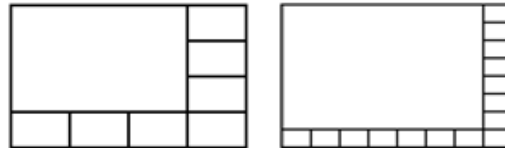

[Figure 5-9. Big / Biggest Channel Mode]



[Figure 5-10. SVR-1648D1 Channel Mode]

※ In Basic Mode ;1/4/9/16, pressing the same mode button leads to screens as shown below.																																							
1 Channel Division Mode (16 Group)																																							
4 Channel Division Mode (4 Group)	<table border="1" style="border-collapse: collapse; text-align: center;"> <tr> <td>1</td><td>2</td><td>5</td><td>6</td><td>9</td><td>10</td><td>13</td><td>14</td> </tr> <tr> <td>3</td><td>4</td><td>7</td><td>8</td><td>11</td><td>12</td><td>15</td><td>16</td> </tr> </table>	1	2	5	6	9	10	13	14	3	4	7	8	11	12	15	16																						
1	2	5	6	9	10	13	14																																
3	4	7	8	11	12	15	16																																
9 Channel Division Mode (3 Group)	<table border="1" style="border-collapse: collapse; text-align: center;"> <tr> <td>1</td><td>2</td><td>3</td><td>8</td><td>9</td><td>10</td><td>2</td><td>10</td> </tr> <tr> <td>4</td><td>5</td><td>6</td><td>11</td><td>12</td><td>13</td><td>1</td><td>11</td> </tr> <tr> <td>7</td><td>8</td><td>9</td><td>14</td><td>15</td><td>16</td><td>3</td><td>12</td> </tr> <tr> <td colspan="6"></td> <td>8</td><td>7</td><td>6</td><td>5</td><td>16</td><td>15</td><td>14</td><td>13</td> </tr> </table>	1	2	3	8	9	10	2	10	4	5	6	11	12	13	1	11	7	8	9	14	15	16	3	12							8	7	6	5	16	15	14	13
1	2	3	8	9	10	2	10																																
4	5	6	11	12	13	1	11																																
7	8	9	14	15	16	3	12																																
						8	7	6	5	16	15	14	13																										
16 Channel Division Mode (2 Group)	<table border="1" style="border-collapse: collapse; text-align: center;"> <tr> <td>1</td><td>2</td><td>3</td><td>4</td><td colspan="4" rowspan="4" style="text-align: center; vertical-align: middle;">1</td><td>2</td> </tr> <tr> <td>5</td><td>6</td><td>7</td><td>8</td><td>3</td> </tr> <tr> <td>9</td><td>10</td><td>11</td><td>12</td><td>4</td> </tr> <tr> <td>13</td><td>14</td><td>15</td><td>16</td><td>5</td> </tr> <tr> <td colspan="4"></td> <td>16</td><td>15</td><td>14</td><td>13</td><td>12</td><td>11</td><td>10</td><td>9</td> </tr> </table>	1	2	3	4	1				2	5	6	7	8	3	9	10	11	12	4	13	14	15	16	5					16	15	14	13	12	11	10	9		
1	2	3	4	1						2																													
5	6	7	8							3																													
9	10	11	12							4																													
13	14	15	16					5																															
				16	15	14	13	12	11	10	9																												

※ The user can view an image on full screen by double-clicking a desired channel in the 4/9/16 Sub-Screen mode. Double-click any part of the screen to return to the previous mode.

※ **Special Mode; Big / Biggest, Channel Switching**

- Front Button and Remote Controller : Press a numeric button to be moved to big/biggest screen.
- Mouse : Double-click on a channel to be moved to big/biggest screen.


※ **Auto Sequence**

Auto Sequence is to rotate images at an interval of the certain time in 1/4/9 Basic Division and Big/Biggest Special Mode. **Auto Sequence is not available in the Basic 16 Division mode.**


- ① Move to {Menu} {Miscellaneous} {Display Setup } and select a duration time(1-10 seconds).
- ② Pressing Front {SELECT} Button / Remote Controller {SELECT} Button / Mouse Arrow Button initiate the Auto Sequence mode.



③ Auto Sequence in Basic 1 / 4 / 9 Division Mode

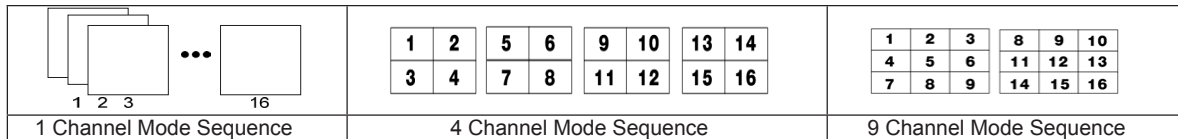

④ Auto Sequence in Special Big Division Mode (same application in Biggest Mode)



(It is only available when multiple cameras are connected.)

5-3-2 Channel Grouping

Channel Grouping is to switch the image location in the screen between channels in the monitoring mode.

- ① On the real-time monitoring screen, select {Menu} {Miscellaneous} {Channel Grouping}.
- ② Select a channel to be switched after moving a yellow-focused selection window.
- ③ Select a channel to be switched when the window shows.
- ④ The Image location of the each channel is changed.

	<ul style="list-style-type: none"> ※ Grouping is not supported for the 1 Channel Division mode. ※ The user can drag the focused channel and drop on the desired channel to switch the location by using a mouse. Also dragging the unfocused channel and dropping on the focused channel is available. ※ Changing the screen division mode causes other division modes to be changed as well. ※ This is only available in the Basic 1/4/9/16 Division mode and not available in the Special Big/Biggest Division mode.
--	--


5-3-3 Spot

Spot is to output a channel that is set with a certain function and Spot has an independent monitor and output. The priority for Spot is Manual Spot > Event Spot > Sequence Spot.

① Manual Spot

The user can designate a spot channel manually.

SVR-1648D1 supports 4ea Spot channels

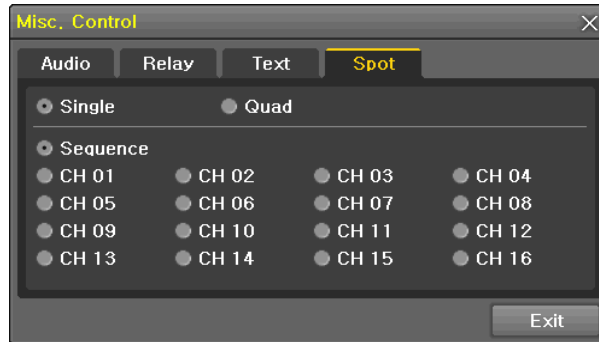

[Figure 5-12 . Spot]

- ② Move to {Menu} {Miscellaneous} {Control} {Spot} and configure on the Single mode, Quad mode, Sequence and Channel.

③ **Event Spot**

Event Spot is to show a channel quickly that is set with the event function in case events (Sensor, Motion and Audio) occur. The event check interval is one second. If events are detected in many channels, it shows a channel with the last event. Move to {Menu} {Setup} {Action} {Alarm} {Spot}.

④ **Sequence Spot**

The user can select more than one channel in Manual Spot and have a sequential image through Spot. Move to {Menu} {Miscellaneous} {Control} {Spot} {Sequence}.


5-3-4 **Menu in Monitoring Mode**

The user can control all functions available in Monitoring Mode in {Menu}.


- ① Press the Menu or right-click mouse button. The {Menu} will then appear.
- ② Select the desired item by using the arrow keys or mouse.
- ③ Press the ESC button or right-click mouse button to end the menu.

5-3-5 **Zoom**

Zoom is to zoom in or out the 1 channel division image in the real time monitoring mode.



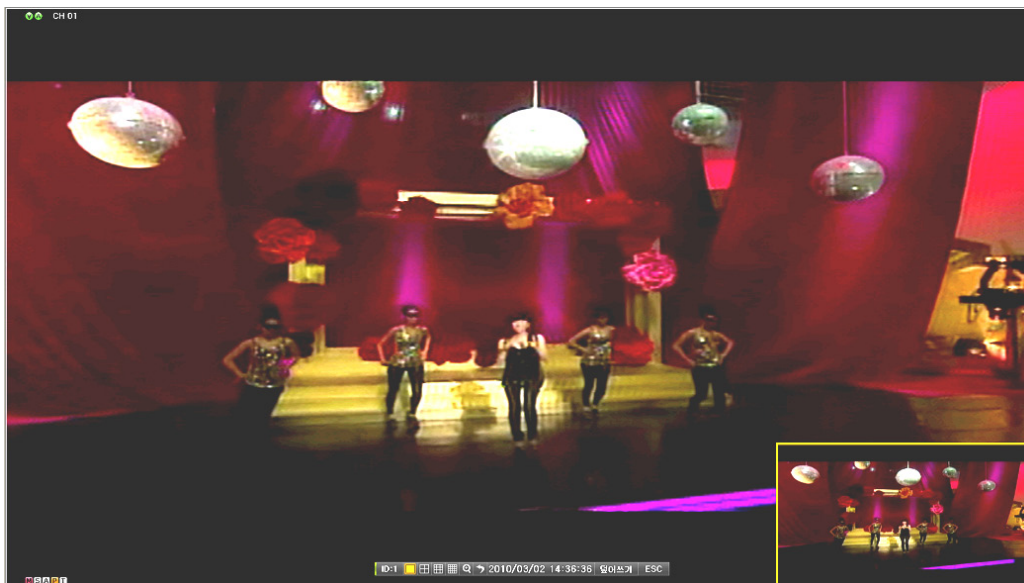

- ① Move to {Menu} {Zoom} or press the zoom icon from the control bar in the real time monitoring mode.
- ② After selecting a channel, it becomes the 1 channel mode and the zoom control screen shows at bottom-right.



[Figure 5-13. Zoom Control Screen]

- ③ In case of the mouse, move the pointer to an area to be zoomed in the zoom control screen and double-click on it.
- ④ Then, it zooms in 3 levels; Normal, x4, x16. Those 3 levels can be controlled by the wheel of the mouse. The user also can left-click and drag the yellow box to move the focused image in higher than the x4 mode.
- ⑤ In case of the remote controller and front panel, it is available to move to 3 levels by using


 **{SELECT}** button in the remote controller and  **{SELECT}** button of the front button.
 The yellow box can be moved by the arrow keys.

5-3-6 Screen Control by using PTZ

This enables the user the real-time monitoring by using PTZ camera.

The PTZ camera must be connected to the system. For external connection, refer to [2-3 Connection of Other Devices] [3] Terminal block]. Select **{Menu}** **{Setup}** **{Definition}** **{PTZ}**.

- ① Configure Protocol / ID / Baud Rate / Duration / Tour.

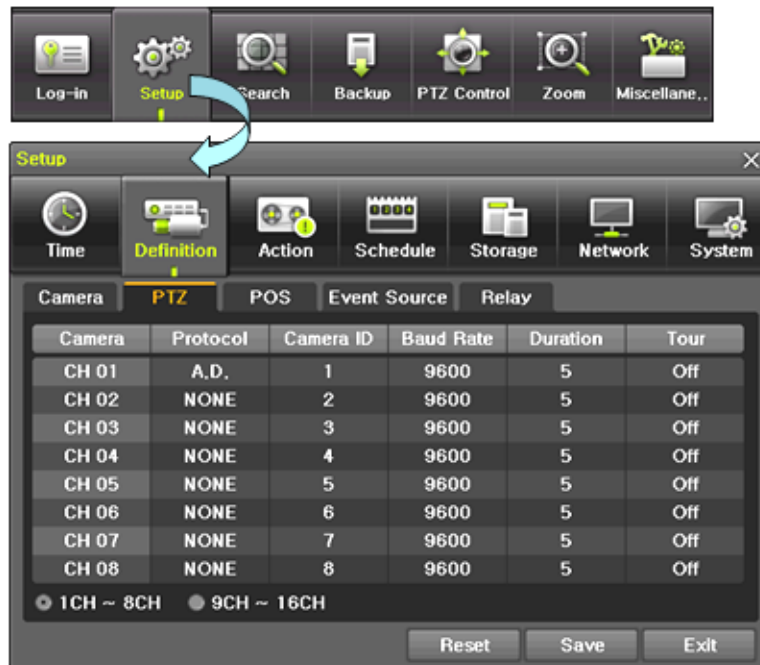

[Figure 5-14. PTZ Setup]

- ※ Baud rate can be selected at 2400/4800/9600/19200/38400.
- ※ Duration can be selected at 5/10/15/20/5-60(User setting) seconds.
- ※ Tour consists of Tour 1/ Tour 2 and each tour can be set with 8 Preset.



※ SVR-1648D1 supports 21 protocols for PTZ control. For supported protocols, refer to APPENDIX.

- ② To control PTZ camera, select **{PTZ Control}** in Menu or press **{PTZ}** in the remote controller.



[Figure 5-15. PTZ Control]



[Figure 5-16. PTZ Control Min./Max.]



In the PTZ mode, there are two function; Max. and Min. Speed can be set between 1-100. Tour has [Tour1] and [Tour2]. Preset can be set 1 to 8. Home Position Time is 1/5/10/User setting(1-60) minutes.




Preset? Using horizontal/vertical/Zoom/Focus movement of PTZ Camera, zoom or focus a certain spot of the image by designating the coordinates and move to the designated coordinates quickly.



Home Position Time? If there are no controlling signals to PTZ camera after a certain time, it goes automatically to the Preset No.1 position as Preset No. 1 is designated as Home Position


5 - 4 System Information and Screen Setup Change

5 - 4 - 1 System Information

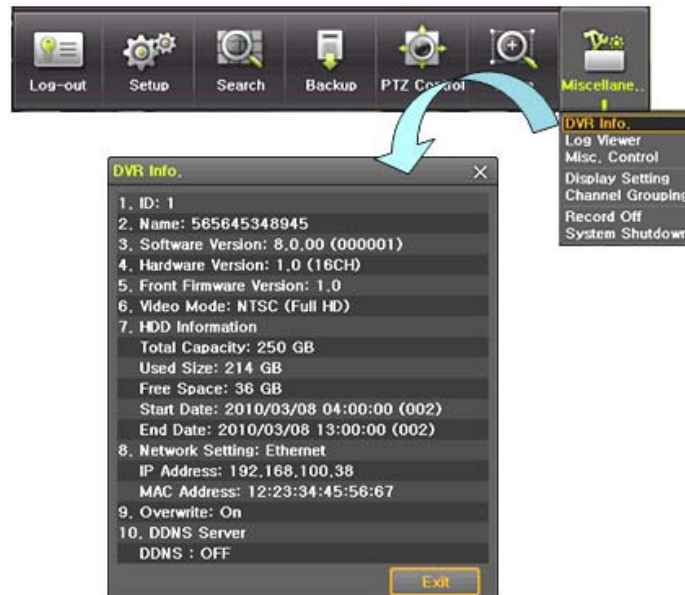

[Figure 5-17. Product Information Window]

5 - 4 - 2 **Screen Brightness/Contrast/Color/Saturation/Sharpen/Camera Adjustment** Select **{Adjust}**, then it becomes the 1 channel mode and a window pops up as shown below.

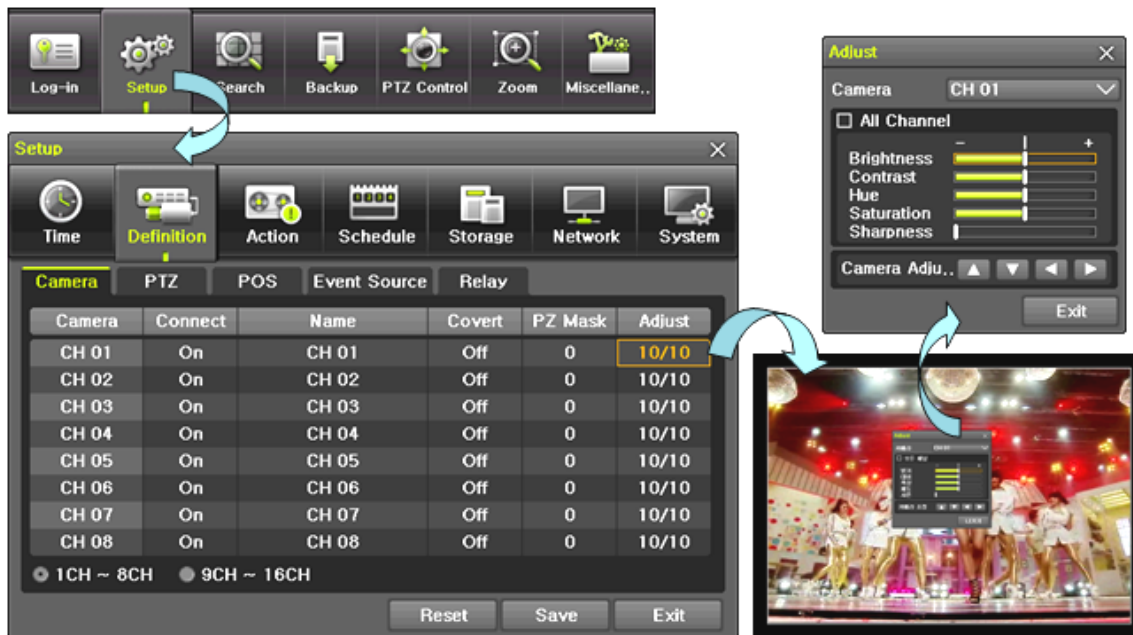

[Figure 5-18. Screen Setup Window]



Moving the camera, down, right, or left excessively may cause black or gray areas to appear on the screen. The level at which such condition does not occur is the proper control range for the camera.

5 - 4 - 3 Display Setting

Camera Title On/Off, Control Bar On/Off, Button Sound On/Off, Sequence Duration 1-10seconds and TV OUT Adjustment are available. After selecting Display Setting, it becomes the 1 channel mode and a menu pops up as shown below.




[Figure 5-19. Display Setting Window]




TV OUT Adjustment is to move the TV OUT screen Up/Down/Left/Right. Moving the screen up, down, right, or left excessively may cause black or gray areas to appear on the screen. The level at which such condition does not occur is the proper control range for the monitor.

5 - 5 Control


In the real-time monitoring, move to {Menu} {Miscellaneous} {Control}.

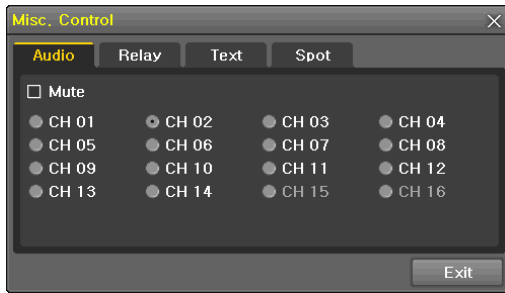

[Figure 5-20. Audio]

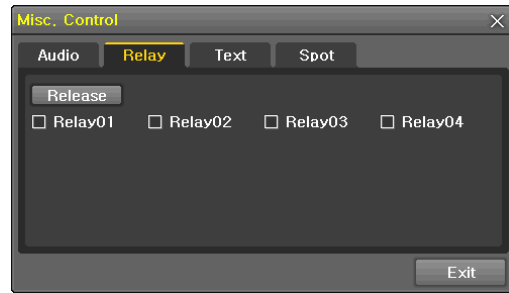


[Figure 5-21. Relay]

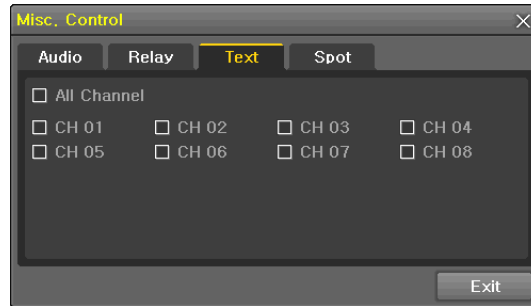


[Figure 5-22. Text]


① Move to the Audio tab and select the channel to be activated or Mute.

 SVR-1648D1 model supports 16 channel audios

② Move to the Relay tab and select.

 SVR-1648D1 model supports 4 channel input

③ Move to the TEXT tab and select.

 SVR-1648D1 model supports 1-16 channel text input

5 - 6 Search

5 - 6 - 1 Search Mode

Move to **{Menu}** **{Search}** in the real-time monitoring mode.



[Figure 5-23. Playback Menu]

5 - 6 - 2 Playback Menu

(1) Calendar Search

Calendar Search allows the user search and playback by [Year/Month/Day/Hour/Minute],[Multi-Channel/Multi-Time/Multi-Day]and [Motion/Sensor/Audio/Pattern].

(2) **Go To The Last**

The user can search and playback the last recorded data by Multi-Channel Mode.

(3) **Go To The First**

The user can search and playback the first recorded data by Multi-Channel Mode.

(4) Go to The Last Played Time


The user can playback from the last played time by Multi-Channel Mode.



※ Go To The First and Go To The Last are only available in {Multi-Channel}.

5 - 7 Calendar Search

5 - 7 - 1 **Search Mode** On the real-time monitoring screen, select {Menu} {Search} {Calendar Search} and then a searching window pops up as shown below.

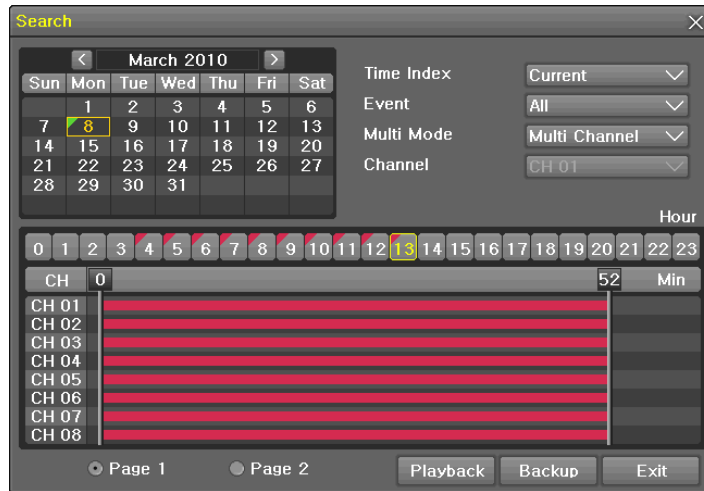


[Figure 5-24. Search Window]

5 - 7 - 2 Year/Month/Day Selection

Select the desired [Year/Month/Day]. The color of the icon at the top-left of square in the calendar indicates the recording status.

5 - 7 - 3 Time Index

- ① Every time when the user changes the time at {Menu} {Setup} {Time} {Date and Time} tab, a new folder(Index) is created and files saved in the folder before the time change can be found at {Menu} {Calendar Search} {Time Index}.
- ② Selecting a file at {Menu} {Calendar Search} {Time Index} leads to a selection window popup and the user can select a file in different folders (before time change).

	※ Searching by the file list is only available in the Multi-Channel Search.
Current	Recorded image files with the current set time.
Old_Number	Recorded image files before the time change.

5 - 7 - 4 Event

Event is to search the data by the events. Select [All/Motion/Sensor/Audio/Pattern/Text].

5 - 7 - 5 Multi-Channel Search

The Multi-Channel Search is to play recorded images of the different channel over a certain designated time.

- ① Select the desired Year/Month in the calendar window.
- ② After selecting the desired search date, each channel is then displayed in the hour bar graph.



The bar graph color in the real-time monitoring mode is same with recording event functionally.

- ③ Move the time line to a specific time point by using the arrow keys or the numeric buttons and press the Search button.
- ④ Selecting the time leads to the recorded video display of each channel in the minute bar graph.
- ⑤ Move the time line to a certain time point by using the arrow keys and the numeric buttons and press the Select button. Playback will then start from the specified time point.

5 - 7 - 6 Multi-Time Search

The user can playback the video contents of the certain channel recorded in the different time zone simultaneously.

Entering into the search mode during the Multi-Time playback leads to the Multi-Time Search.

- ① The way of the date search is same as the Multi-Channel Search.
- ② The hourly recording status of the selected date is viewed after selecting a desired date.
- ③ Select the start time and channel by using the arrow keys.
- ④ The hourly displayed video of the selected channel will then be displayed in the minute bar graph.
- ⑤ Move the time line by using the arrow keys and the numeric buttons and specify the time. Afterward, press the Start button and play back the contents.



※ A different time zone means continuous 16 hours.

5 - 7 - 7 Multi-Day Search

The user can playback the video contents of the certain channel recorded in different dates simultaneously.

Entering into the search mode during the Multi-Day playback leads to the Multi-Time Search.

- ① The way of the date search is same as the Multi-Channel Search.
- ② The date list and the hourly recording status starting from the selected date are viewed by selecting the desired date.
- ③ Select the start time and channel by using the arrow keys.
- ④ The recorded video of the selected channel will then be displayed as the minute bar graph.
- ⑤ Move the time line by using the arrow keys and the numeric buttons and specify the time. Afterward, press the Start button and play back the contents.

5 - 8 Playback



[Figure 5-25. Playback Screen]



- ※ There are five routes to play the recorded image.
 - Playback in the Calendar Search
 - Select **{Playback} in {Menu} {Search} {Calendar Search} {Search}**.
 - Playback in the Go To The Last
 - Select **{Menu} {Search} {Go to The Last}**.
 - Playback in the Go To The First
 - Select **{Menu} {Search} {Go To The First}**.
 - Playback in the Last Played Time
 - Select **{Menu} {Search} {The Last Played Time}**.
 - Playback in the Log View
 - After selecting **{Menu} {Miscellaneous} {Log Viewer}**, select or double-click the time line listed to play.

- ※ SVR-1648D1 provides a variety of the playback.

- Smart Search**
- PCD Search**
- Calendar Search**
- Multi-Time**
- Multi-Day**
- Multi-Channel**
- Panorama Play**
- Event Play**
- Zoom Play**
- Audio Play**










5 - 8 - 1 Playback and Playback Speed Control

- ① In the Playback mode, the user can play back video contents by using buttons as shown below.
- ② After the data is played to the end, the data of the next time zone will be automatically searched and played (this function is possible only in the Multi-channel Playback mode; both backward playback and forward playback are possible).


- ③ Pressing   buttons, the user can adjust the playback speed by (x 1) / (x 2) / (x 4) / (x 30).



[Figure 5-26. Playback Status and Control Window]

Description of the Search Buttons		
Button	Name	Features
	Channel mode Change	Switch the channel mode.
	Zoom Mode	Switch to the Zoom mode.
	Forward Play/Fast Forward	Press one time - Playback forward (x 1) Press two times - Fast forward (x 2) Press three times - Fast forward (x 4) Press four times - Fast forward (x 30) Pressing one more time in x30 leads to x1 back.
	Forward Frame by Frame	Playback frame-by-frame Pause
	Pause	Pause
	Reverse Frame by Frame	Reverse playback frame by frame Pause
	Reverse Play/Fast Reverse	Press one time - Playback reverse (x 1) Press two times - Fast reverse (x 2) Press three times - Fast reverse (x 4) Press four times - Fast reverse (x 30) Pressing one more time in x30 leads to x1 back.
	ESC	Exit out of Playback Mode.
		Status bar indicating information of the hourly recorded image data and the speed.

Selecting the right-mouse button or menu button in the Playback Mode pops up the **{Playback Menu}** as shown below.




[Figure 5-27. Playback Menu]

5 - 8 - 2 Smart Search

This function is used to search an image with the object movement at a specific zone quickly. Searching by each channel and a detail control are available.

Type	Content
Sensitivity	5 levels; Lowest / Low / Middle / High / Highest
Minimum	Mosaic pixel control available between 1- 10
Quick Search	In the NTSC mode, search 30 frames once. In the PAL mode, search 25 frames once.
Detail Search	Search all frames.

- ① Move to the Smart Search and select the desired channel.
- ② After shifting to the 1 channel mode, select areas to be smart searched.

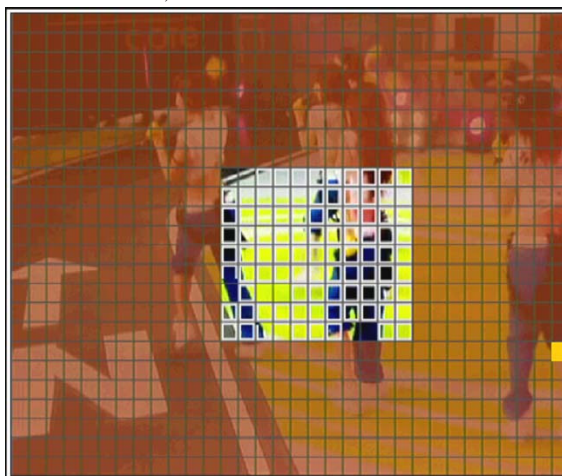


[Figure 5-28. Smart Search Area Designation]

- ③ The 32 * 24 pixel mosaic mode appears. In the beginning, all pixels are selected. Designate an area by left-click and drag the pixel mosaic pointer(deep yellow). Designate another area by repeating the same way.



It detects motions in non-designated blocks.

- ④ Right-click brings up the menu as shown below. Configure each category and press the Playback button to start searching.

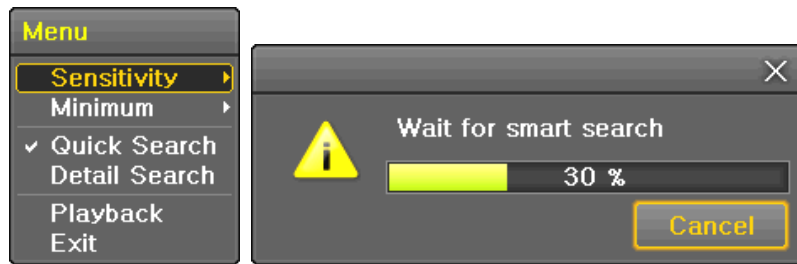

[Figure 5-29. Smart Search Motion Detection Window]

- ⑤ It may take time during the searching. Start the playback after searching.

5-8-3 PCD Search

- ① This is to detect appearance or disappearance of the object at the pattern change detection area.
- ② In case a motion is not detected within a set time at the pattern change detection area, it inspects the pattern change.
- ③ PCD search has the same searching procedure as the Smart Search and also provide a detail control as shown below.

Type	Content
Sensitivity	5 levels; Lowest / Low / Middle / High / Highest
Minimum	Mosaic pixel control available between 1- 10
PCD TIME	No motion time control between 1-8

5-8-4 Calendar Search

Move to {Menu} {Search} {Calendar Search} and then a searching window pops up.

5-8-5 MULTI TIME

The user can playback the video recorded image of the certain channel recorded in different time zones simultaneously. The arrangement of the searching result is the past to recent format.

5-8-6 MULTI DAY

The user can playback the video recorded image of the certain channel recorded in different dates simultaneously. The arrangement of the searching result is the past to recent format.

5-8-7 MULTI CHANNEL

Multi-Channel Search is to play recorded images of the different channel over a certain designated time.

5-8-8 Panorama Play

Panorama Play is to play recorded images of the certain channel frame by frame. Panorama Play can be viewed at 16 frame / 8 frame / 4 frame / 1 frame.



[Figure 5-30. Panorama Playback]

5-8-9 Event

Event is to search and play events[All/Motion/Sensor/Audio].

5-8-10 Audio

Select a desired audio channel to be played.

5-8-11 Backup

The user can save the backup image data and capture the image into [CD/External Device].

Backup	Save the recorded data into [CD/External Device].
Snapshot	Capture and save the current displaying screen.

5-8-12 Screen Mode

Screen division is available in the Playback mode as same in the Monitoring Mode.

[1 / 4 / 9 / 16 Mode] can be selected.


- ① Select the screen division mode by using the mouse or arrow keys in the front panel and remote controller.



[Figure 5-31. Display Mode]

5-9 Log Viewer

DVR records all Log information over the system operation including Power on/off, System Setup and Network Access. Move to {Menu} {Miscellaneous} {Log Viewer} to see the logs.

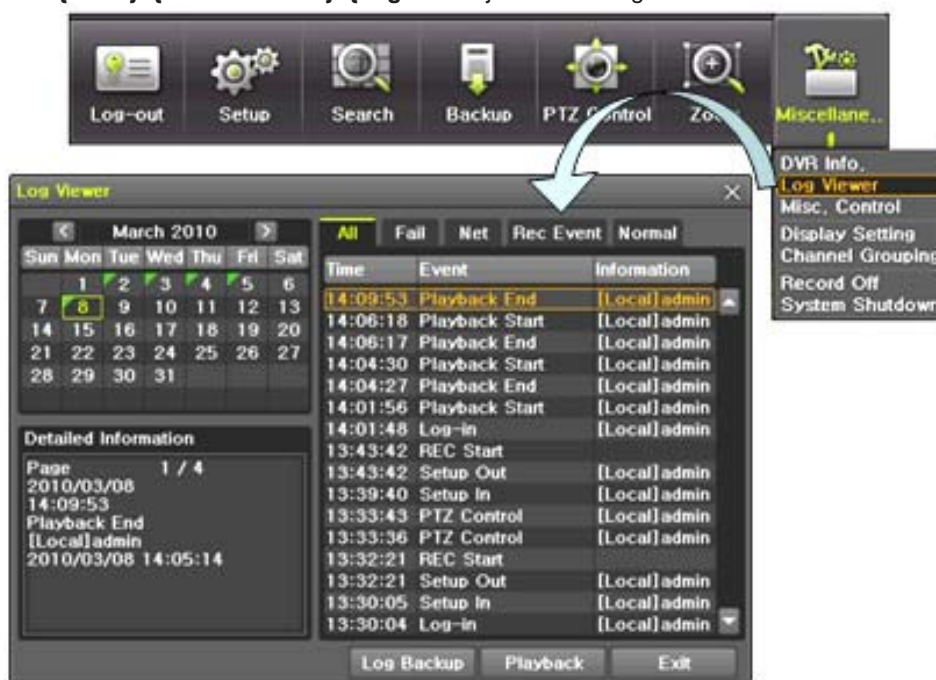


[Figure 5-32. Log View]

5-9-1 Log Type

General	Logs related to power ON/OFF, file copy/backup failure, setup start/end, playback, and other basic system operations
Recording Event	Logs related to the recording including motion detection and sensor detection, Audio detection
Network	Logs related to network operations including network login, network logout, and network live
Fail	Logs related to system operation failures including signal loss and network connection failure
All	Logs related to all system operations

5 - 9 - 2 System Log Viewer

- ① In the real-time monitoring mode, {Menu} {Miscellaneous} {Log Viewer}, then, Log List Window pops up.
- ② On the activated calendar window, select the desired date (year/month/day) by using the arrow keys and the Select button.
- ③ The user can check the time and the log type by using the arrow keys in the log list.
- ④ Use the Up/Down button to check the logs by time and type on each page.
- ⑤ The user can shift the focus to a certain time zone to play the certain time (playback will start from the time point when logs are saved)
- ⑥ Click the right-mouse button or select {Menu} button in the front panel and select {Hour} to move the desired log time zone.

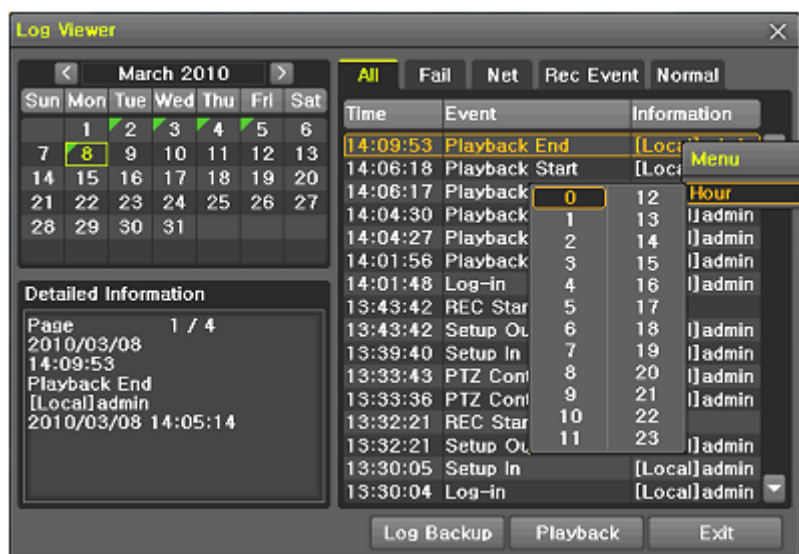

[Figure 5-33. Move to the log list of the certain time zone in Log View]



Time Changed Log Data View

The stored data folder is created each time the user changes the time. A blue triangular icon is displayed at a date in the calendar window that time changes are made. Otherwise, a red triangular icon is displayed at an unchanged date. To view the log details, select the desired date with a red icon. Selecting a date with the blue icon causes the changed date list window to appear.

5 - 1 0 Recording

5 - 1 0 - 1 Recording Types

It supports various recording types as shown below.









Recording Type	Description
Continuous	The Continuous recording will be initiated based on the general frame rate.
Motion	When motion is detected, the recording will be initiated based on the event frame value.
Sensor	When input signal from an external sensor is generated, the recording will be initiated based on the event frame value.
Audio	When audio is detected, the recording will be initiated based on the event frame value.
Pattern	When there is a pattern change in the screen, the recording will be initiated based on the event frame value.
Text	When a text is received from POS device, the text will be recorded.

5 - 1 0 - 2 Recording Setup

Go to {Menu} {Setup} {Recording} for the Recording Setup. For more information, move to {Menu} {Setup} {Recording} {Recording}.

5 - 1 0 - 3 Recording Status View

(1) Recording Status by Color

※ Recording Event / Recording Mode Icon ※		
Recording Event		Motion Detection Recording
		Sensor Recording
		Audio Recording
		Pattern Change Recording
		Text Recording
Recording Mode		Video Recording
		Audio Recording
		Text Recording

(2) Starting and Stopping Record All

In the real-time monitoring mode, the user can start or stop the recording of all channels by selecting {Menu} {Miscellaneous} {Record On/Off}.

(3) Stopping Record All

- ① In the real-time monitoring mode, select {Menu} {Miscellaneous} {Record On/Off}.
- ② Enter the password of the local system administrator.
- ③ On the recording stop confirmation window, select the(Yes) button.
- ④ Any channel recording in progress will then stop, and the corresponding status will be displayed on the recording status window.

(4) Starting Record All

- ① In the real-time monitoring mode, select {Menu} {Miscellaneous} {Record On/Off}.
- ② On the login window, enter the password of the local system administrator.
- ③ The recording of all channels will then start based on the previous setting, and the recording status will be displayed.

5 - 1 1 Backup

In order to backup the data, make sure to check that either internal or external storage devices(CD, DVD or HDD) supports USB 2.0 is connected. For supported external devices, refer to Appendix. The user can back up data in the real-time monitoring, search, log, or the playback mode.

5 - 1 1 - 1 Backup in The Real-Time Monitoring Mode

- ① In the real-time monitoring mode, select {Menu} {Backup} {Backup}. The backup menus will then appear.
- ② The automatic backup time is set to 5 minutes before the Copy (Backup) button is pressed, and the end time, to the time the Copy (Backup) button is pressed.
- ③ All channels containing data at the time of backup are backed up automatically. Depending on the divided screen mode, however, only those channels that can be viewed may be selected.
- ④ For the remaining backup procedures, see [5-33 Common Backup Procedure].

5 - 1 1 - 2 Backup in Search Mode

- ① Select {Menu} {Search} {Calendar Search}.
- ② Click the right-mouse button or select {MENU} button in the front panel.
- ③ The automatic backup start time is set to the year/month/date/hour/minute set in the search mode, and the end time, to the last minute/second of the data existing at the selected time.
- ④ All channels with existing data at the time of backup are backed up automatically.
- ⑤ For the remaining backup procedures, see [5-33 Common Backup Procedure].


5-1 1-3 Backup in Log Mode

- ① Select a date in {Menu} {Miscellaneous} {Log Viewer} and select a log related to the data to be backed up.
- ② Click the right-mouse button or select {MENU} button in the front panel.
- ③ The automatic backup time is set to 5 minutes before the selected log is generated, and the end time, to the time the selected log is generated.
- ④ All channels with existing data at the time of backup are backed up automatically. If a log has been generated for a specific channel, however, then only that channel is selected.
- ⑤ For the remaining backup procedures, see [5-33 Common Backup Procedure].

5-1 1-4 Backup in Playback Mode


- ① In the Playback mode, select {Menu} {Backup}. Any playback in progress at this time will stop.
- ② The automatic backup time is set to 5 minutes before the Copy (Backup) button is pressed, and the end time, to the time the Copy (Backup) button is pressed.
- ③ All channels containing data at the time of backup are backed up automatically. Depending on the divided screen mode, however, only those channels that can be viewed may be selected.
- ④ For the remaining backup procedures, see [5-33 Common Backup Procedure].

5-1 1-5 Common Backup Procedure

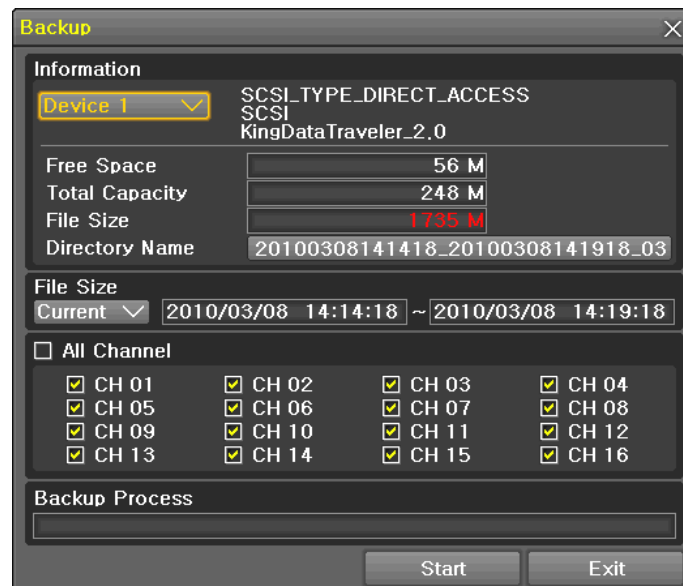

[Figure 5-34. Backup Window]

- ① [Figure 5-34] shows the initial backup window menus.
- ② A list of the devices that can be selected is outputted with simple information of the currently selected devices
- ③ Selecting a device by pressing the Select button causes the free space and total capacity for the selected device to be displayed.
- ④ Selecting a device causes the directory name based on the initial values for the time and channel to be displayed and the size of the file to be backed up to be calculated.
- ⑤ The directory is named as same with the backup time. The first 12 digits are determined by the year/month/day/hour/minute/second for From, and the 12 digits in the middle, by the year/month/day/hour/minute/second for To. The last 2 digits are determined by the number of folders in the selected device.
- ⑥ Selecting a device enables selecting the backup time as well. As a rule, the From time cannot be later than the To time, and the To time cannot be earlier than the From time.
- ⑦ To change the start and end time, press the Select button after choosing the start and end time. Change year/month/day/hour/minute/second by using arrow keys and press the ESC button.
- ⑧ Changing the backup time causes the name of the directory to be backed up to be changed as well.
- ⑨ If the file to be backed up exceeds the free space, its size is displayed in a yellow box in case the selected device is capable of rerecording and in a red box if not.

 If the backup storage device is not formatted, in case the box displaying the size of the file to be backed up is displayed in yellow, and if backup is executed by pressing the Copy (Backup) button, a prompt asking (Yes/No) whether to erase the device will appear. Selecting {YES} causes the storage medium for the selected device to be erased.

- ⑩ Press the Copy (Backup) button. A prompt asking (Yes/No) whether to proceed with the backup.



※ Select **[Yes]** to back up the data or **[No]** to stop the backup. Otherwise, press the **[Cancel]** button to return to the device selection mode on the backup window.

- ⑪ Select **{Yes}** to continue the backup.


5-1 2 Setup Backup

The Setup Backup is to back all setup values of the current menu up. This function enables the user to copy the setups and apply them into other devices.



[Figure 5-35. Backup and Sub-menu Setup Backup]

- ① For the Setup Backup, a device for backup must be connected.
- ② Move to **{Menu} {Backup} {Setup Backup}** and a window shown below appears. The setup is copied by the name shown below.

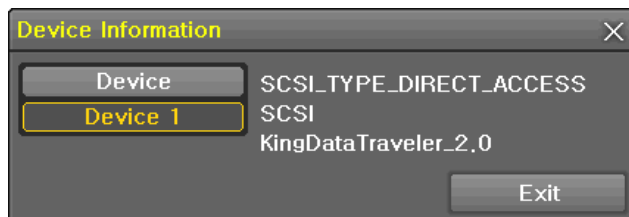

[Figure 5-36. Setup Upgrade]

Saved as the name below.



HD116T_565645348945_80_01_20100303_113237.bin


① ② ③ ④ ⑤
① Model ② DVR name ③ Version ④ Date ⑤ Time

- ③ Move to {Menu} {Setup} {System} {6. Upgrade} ->{Setup} after insert the backup device.
- ④ With this way, the user can upgrade a new device with the current setup values in easy way.

5-1 3 Log Backup

This is to back logs up including General/ Recording Event / Network / Fail.


- ① Move to {Menu} {Backup} {Log backup} and start the backup process after selection of the events.

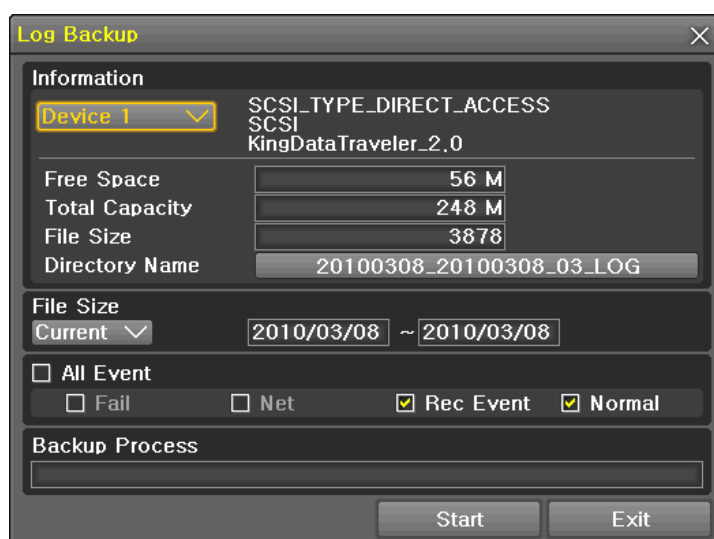

[Figure 5-37. Log Backup]

.Log files are created at a folder shown below.



 20100303_20100303_02_LOG
565645348945_20100303.log
.log file is the text file.

5-1 4 Print

The user can print the current displaying image and GUI.



A print using PS(POST SCRIPT) is recommended.

5-1 5 NAS Backup

The NAS backup is to transmit a data in the file format from DVR to Backup devices networked.

- ① Select {Menu} {Backup} {NAS Back} in the real-time monitoring mode, NAS backup window pops up.
- ② NAS On/Off : NAS Backup On/Off.
- ③ IP : Enter NAS device IP.
- ④ Account : Setup the account.
- ⑤ Directory : Designate a directory where the backup data is saved.
- ⑥ Overwriting : Overwriting On/Off.

5 - 1 6 Snapshot

The Snapshot function lets the user create a JPG file in the real-time monitoring, playback, search, or log mode and back up the image data.

- ① To back up the currently displayed image, select {Menu} {Backup} {Snapshot} in the real-time monitoring, Playback and Log mode.
- ② When only one USB2.0 backup device (excluding ODD devices) is searched, the JPG file is stored in the same device.
- ③ If there are no or more than two USB2.0 storage devices (excluding ODD devices), a window for selecting the device will be displayed.
- ④ If the selected device is an ODD device, a prompt asking whether to back up in the ODD device.

Chapter 6 . Setup

6-1 Time

※ Function Description

1. Time Synchronization

1) Synchronization with the NTP server The time is synchronized once every hour with the NTP Server.

A. Automatic Setup

The nearest server from the user's zone will be selected for connection. If the connection fails, the next nearest server will be chosen.

B. User Setting

The user sets the URL or IP for the NTP server. If connection is not established, a message will be sent to the user, and the related log, saved.

If synchronization with the NTP server fails, synchronization with RTC will be established.

2) Synchronization with the DVR Time Server The DTS server is executed in the **DVR system** and the time is synchronized every hour. DTS clients of DVR series referring to the DTS synchronize the time of the DVR system with DTS.

When the DTS time or a zone is changed, the change is reflected on DVR series belonging to the network (the synchronization signals are broadcasted without passing through the router or gateway). The DVR time server does not support automatic connection.

2. Daylight Saving Time (DST) Setup


Regardless of whether NTP server or DST server is referred to, DST is automatically processed according to the time.

3. Time Setup by User

The user can set the time directly.

For the NTP client setup, the user can read the time but not change it.

※ Move to {Menu} {Setup} {Time} to set up time functions.

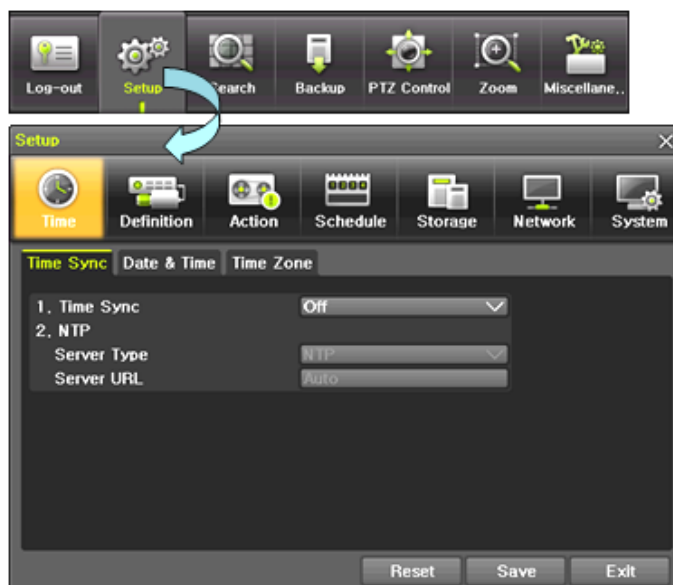

[Figure 5-38. Setup / Time Menu]

6-1-1 Time Sever

① Select Time Sever / Sever Type / Sever URL.

Off	The time server is not used.
NTP	NTP is used to set the time for the time DVR.



{NTP} setup is available when {Time Sync} is set as NTP.

The user can enter the IP only when the server type is DVR. For the NTP server, Automatic, IP, or URL should be selected.

6-1-2 Date and Time

(1) Date and Time



Only available when Time Server is off.

The system date and time format is Year/Month/Day Hour/Minute/Second.

- ① By using the arrow keys and the Select button, move the focus onto the desired field; Year/Month/Day Hour/Minute/Second and press the Select button.
- ② Select a field you want to change by using the arrow buttons and press the Select button.

(2) Time Display Format

Select Time Display Format among [Day/Month/Year] / [Month/Day/Year] / [Year/Month/Day].

6-1-3 Standard Time Zone

(1) Standard Time Zone

- ① Select {Standard Time Zone}.
- ② On the selection window, select the standard time zone you want to set.

(2) DST

- ① By using the arrow keys and the Select button, select {Summer Time}.
- ② On the selection window, select On/Off by using the arrow keys and the Select button.

(3) Start Time

- ① By using the arrow keys and the Select button, select {Start Time}.
- ② On the selection window, set up Start Time by using the arrow keys and the Select button.

(4) End Time

- ① By using the arrow keys and the Select button, select {End Time}.
- ② On the selection window, set up End Time by using the arrow keys and the Select button.



- ※ For a weekly setting in the **{Start Time}** and **{End Time}** fields, set Day to 0.
- ※ After the Daylight Saving Time is selected, the existing data will be displayed as "OLD_" in the search and log list.

6-2 Definition



6-2-1 Camera

① Connection

Used to set whether to connect or disconnect each camera channel.



※ When the camera channel is set to disconnected, the video contents will not be displayed even if the camera is actually connected.

② Title

Name each camera. Max. 20 letters are available.

③ Covert

Used to hide the video channel on the real-time monitoring screen.



※ Video data are being saved on the real-time monitoring screen even though they are displayed in black.

④ PZ Mask

Used to hide a certain area of the real-time monitoring screen. After selecting PZ Mask over each channel, it becomes the 1 channel division mode and designate sections where you don't want to monitor.

⑤ Adjust

Adjust Brightness/Contrast/Color/Saturation/Sharpen/Camera.

6-2-2 POS

Setup the protocol and baud rate of the POS device.

6-2-3 Event Source

Select {Menu} {Setup} {Definition} {Event Source}.

(5) Motion Area

The user can setup the motion detection area. Area setup related to motion and PCD can be decided.



[Figure 5-40. Motion Area Setup]

- ① Select Motion Area of each channel.
- ② It becomes the 1 channel division mode and rectangular boxes appear where motions occur. Drag the yellow pixel cursor by using the mouse or the front button/remote controller and select pixels where motion detection doesn't applied. The selected area turns brown.
- ③ Select Exit to finish.

(1) Motion Sensitivity : Lowest/Low/Middle/High/Highest.

(2) PCD Time : Select between 2/3/4/5/6/7/8/9.

(3) Sensor Type : Select the sensor type.

(4) Sound Sensitivity : Lowest/Low/Middle/High/Highest

6 - 2 - 4 **Relay** Select the relay type.

6 - 3 **Action**

The Main setup is to configure the environment of record and system and major functions.

In the real-time monitoring, move to **{Menu} {Setup} {Action}**



[Figure 5-41. Setup / Action]

6-3-1 Schedule Selection (Schedule1 ~ Schedule4)

- ① Each channel can be scheduled in 4 different schedules. This schedule can be set as the recording schedule and each time can be 4 different schedules.

6-3-2 Event

This is to set the events On/Off of Motion / Sensor / Audio / Pattern / TEXT.

Recording Type	Description
Continuous	Continuous recording based on the Normal Speed frame rate.
Motion	When motion is detected, recording will be initiated based on the event frame rate.
Sensor	When input signal from an external sensor is generated, recording will be initiated based on the event frame value.
Audio	When audio is detected, recording will be initiated based on the event frame value.
Pattern	When there is a pattern change in the screen, recording will be initiated based on the event frame value.
Text	When a text is received from POS device, recording will be initiated based on the event frame value.

6-3-3 Recording


(1) Recording Resolution

Used to set the resolution of the recorded channel.

Type Resolution	Resolution by Video Type	
	NTSC	PAL
CIF	352 x 240	352 x 288
2CIF	704 x 240	704 x 288
4CIF	704 x 480	704 x 576

(2)Recording Quality

Used to set the quality of the recorded video. Select among five levels **{Lowest} / {Low} / {Middle} / {High} / {Highest}**.

	※ The higher picture quality, the bigger file size.
---	---

(3)Frame Rate

If the user configures Normal Speed and Event Speed at the same time, the continuous recording follows Normal Speed frame rate and the event recording follows Event Speed frame rate.

Normal Speed	Set the recording frame rate for Continuous recording.
Event Speed	Set the recording frame rate for Motion, Sensor and Audio, Pattern, Text

Model Resolution	Maximum Recording Frame by Resolution		
	CIF (NTSC/PAL)	2CIF (NTSC/PAL)	4CIF (NTSC/PAL)
SVR-1648D1	480/400fps	480/400fps	480/400fps

(4)Audio


Used to set the recording of the external audio input linked to the system.

6-3-4 Alarm

※ This function is used to generate alarms through the PTZ Preset/e-mail/spot 1/Popup/Callback in case of an event. PTZ preset can be configured between 1-8.



※ Popup function is to inform event occurrence to the user through a warning window in the real-time monitoring mode.

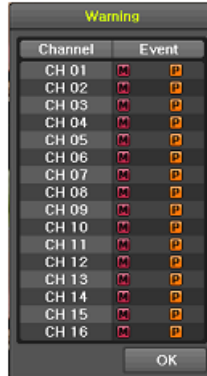

[Figure 5-42. Pop up Alarm]

6-3-5 Duration

Setup Pre-Recording(On / OFF), Post-Recording(5 / 10 / 15 / 20 / 60 / 150 / 300 seconds). ※in Pre-Recording, images of the last 7 seconds before the event occurrence are recorded.

6-3-6 Log

Setup On / Off for Motion / Sensor / Audio / Pattern / TEXT.

6-3-7 Advanced

Setup Watermark (On/Off), QP Control.

※ QP Control is to adjust the size of the saving file by adjusting quality of the image.

QP Control has two types; CBR and VBR.




CBR : Consistent size and variable quality

VBR : Consistent quality

CBR and VBR can be set in 5 levels depending on recording quality.

6-4 Schedule

SVR-1648D1 provide 4 different recording mode configurations. Each schedule mode can be set one week/24 hours and the recording follows the setting automatically.

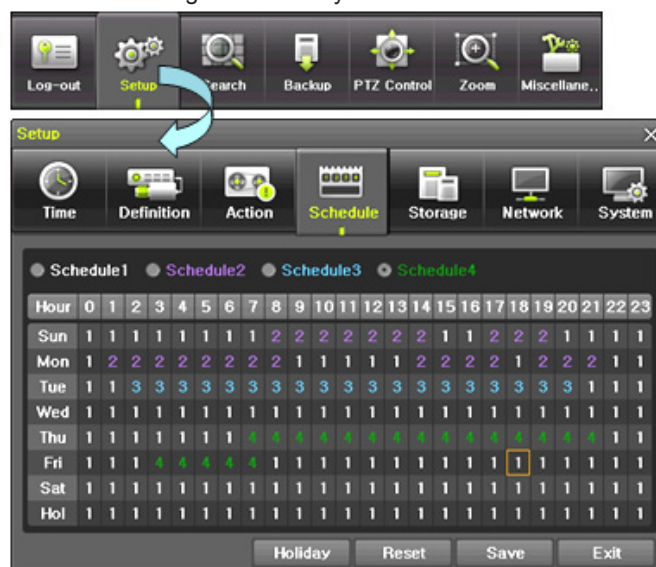

[Figure 6-43. Schedule Window]

6-4-1 Schedule Setup

Select one schedule among Schedule 1 , Schedule2, Schedule3 and Schedule4.


(1) Selection Tip

- ① Select the day and time to be set by using the arrow keys.
- ② Select after moving the cursor onto Time(0-23) or Day(Sun. – Holiday) then the user can configure the whole line at once.
- ③ Using the mouse can be easier.

(2) Holiday Registration


This feature is used to enable the user to set the holidays and schedule independently.

- ① Move to **{Schedule} {Holiday}**.


	<ul style="list-style-type: none"> ※ If the date for the holiday and day of the week are the same in the {Schedule} menu, the holiday setup will have priority over the date setup. ※ Designated holidays are marked with a red tag.
---	---

- ② On the Holiday Registration Window, select the date by using the arrow keys and the Select button and press the Select button.
- ③ After setting the holiday, move to **{Save}** at the bottom of the menu. Afterward, press the Select button.

6-5 Storage

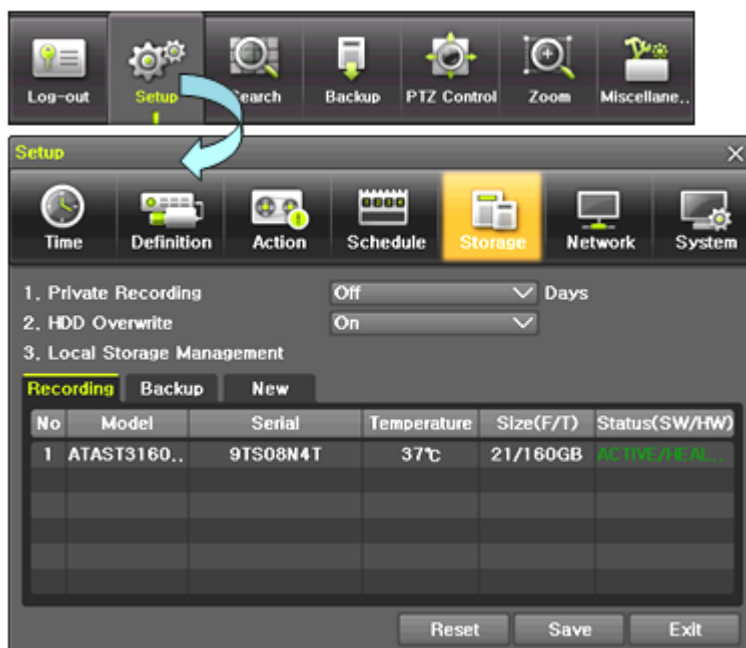

[Figure 6-44. Storage Window (Local)]

	<p>In the Storage menu, To apply the new setting, save the new setting after changing the setting. Reset: Initialize the menu to the basic setting.</p>
---	---

6-5-1 Max. Recording Days

This is to limit the recording days. You can set None/1day/7days/30days/User setting(1-31).

6-5-2 HDD Overwrite

- ① Select On/Off for HDD Overwrite.

On	If there is no more hard disk space left, the existing files will be overwritten by starting with the oldest.
Off	If there is no more hard disk space left, the further recording will not be executed.

6-5-3 Local Storage Management

(1) Local Storage Management Function

Local Storage refers to the internal hard disk and storages connected to the system via USB. Local Storage is classified and managed as **{New}**, **{Direct}** and **{Backup}**, and functions are described below.

① New

All storages, initially detected are managed in **{New}**. All initially detected storages are displayed as New and can be changed into Storage or Backup.

Direct Initialize	Changes the selected storage into a dedicated (Direct) storage.
Backup Initialize	Changes the selected storage into a backup storage.



In **{New}**, At least, one storage shall be selected as a dedicated storage. Otherwise, the data cannot be stored in the real time.

② Direct

The saving(Direct) storage is managed in Direct. The saving(direct) storage stores data on the hard disk in the real time. Five commands can be executed. Depending on the S/W status, however, some commands cannot be executed.

New	Returns the status of the selected storage device to New; if this command is executed, the selected storage device will be moved to the {New} storage device manager.
Online	Changes the selected storage device in online state.
Offline	Changes the selected storage device in offline state.
Format	Format the selected storage.
Eject	Separate the selected device completely from the software.



※ Physical states supporting the execution of the commands above includes Healthy and Warning. In fault state, however, no command can be executed.



When removing a hard disk installed in the DVR or storages connected to USB port, the user must execute the **{Eject}** command first.

③ Backup

The backup storage is managed in Backup. Backup storages are not used to store data; rather, they are only used to back up the data. The user can execute only the **{New}** command.



Depending on the storage type, the storage is used only for (Direct) or (Backup) purposes.

(2)Composition of the local storage device




※ There are three software status types.

Active	Connected to storage or backup device; currently saving the data.
Online	Only connected to storage or backup device.
Offline	Not connected to storage or backup device.



※ There are three hardware status types.

Healthy	Connected to storage or backup device; functions normally.
Warning	Connected to storage or backup device, but error was detected; in this case, data storing or backup cannot be made (for more information, see the description below).
Fault	Not connected to storage or backup device; cannot perform data saving or backup.

-
1. **Fault State** : The storage device is completely damaged, and none of the S/W operations can be performed. The fault state is not related to a DVR problem. The DVR has detected the fault and stopped the recording.
 2.  **Warning State** : The storage device has a physical error that can be corrected by the storage device or by the DVR. If the error is not taken care of, however, the storage device is likely to be damaged (and shift to fault state). Backing up data in the corresponding storage device and replacing the device with a normal one are strongly recommended.
 3. If there is an active storage device with a warning or a fault, a message is displayed on the upper left part of the screen.
-

(3) Instruction when adding the local storage device

- ① Open the system body and install a new disk (connect the data cable and the power cable)
 - ② Connect power to the system and boot the system.
 - ③ Select **{Menu} {Setup} {Storage}** by using the arrow keys and the Select button.
 - ④ A newly displayed disk will then be displayed as **{New}**.
 - ⑤ Select a newly installed disk by using the arrow keys and the Select button and initialize the disk as a **{Direct}** or a **{Backup}** disk. The following describes the method of setting the saving(direct) storage.
 - ⑥ **{Direct}** shows the status of the newly installed disk online.
-

※ **Selecting {Direct-Init} or {Backup-Init} causes all data in the device to be erased. Therefore, caution is required.**

※ **While {Direct-Init} or {Backup-Init} is being set up, do not remove the device (may cause an error when detecting the device).**




※ **To use the external or portable storage device for system upgrade, set to {Backup-Init} in the {New} item for {Main Setup} {Storage Device} {Local Storage Device Management}.**

※ **When used in DVR equipment for the first time, a backup USB device will always be detected in the {New} category. Therefore, a USB device in the {New} category must be set up as {Backup-Init} prior to use for backup. A USB device that has gone through this procedure will be detected in the {Backup} category when used again in the DVR equipment.**

(4)HDD Format for Direct

Select the model first.

As shown below, proceed with the following order {Offline} {Format} {Online}.

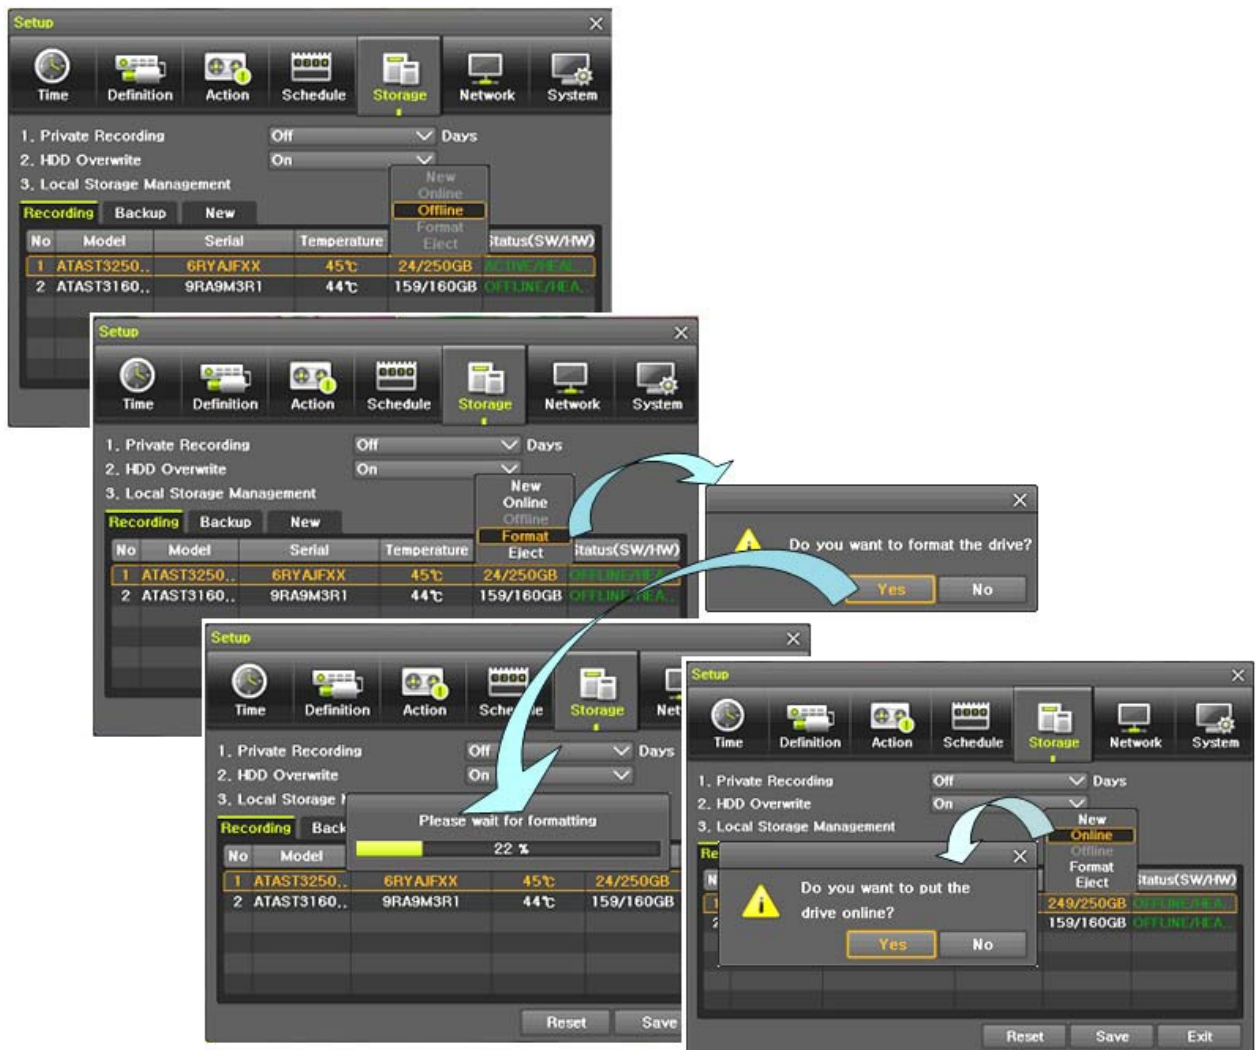

[Figure 6-45. Storage Format Procedure]



It may take some time during formatting.

After formatting, select the model again and set as Online.

6 - 6 Network



[Figure 6-46. Setup Network Window]

6 - 6 - 1 Ethernet

(1) TCP/IP

This is to use a fixed IP in the Local Area Network environment.

- ① Select **{Ethernet}** in **{Menu}** **{Setup}** **{Network}**.
- ② Select **{TCP/IP}**.
- ③ Save after filling in IP Address, Subnet Mask, Default Gateway, Primary DNS, and Alternative DNS.

(2) ADSL

This feature is used in the user authentication-type ADSL communication environment.

- ① Select **{ADSL}**.
- ② Save after filling in User Name and Password.

6 - 6 - 2 DDNS

As part of the DNS system, the Dynamic Domain Name System (**DDNS**) service updates IP addresses of the host name in the real time and allocates fixed domain names to systems linked to dynamic IP addresses to allow users to use the same DNS name regardless of the change of in the IP address. It provides dynamic DNS to ensure URL access in the dynamic IP environment.

User can monitor the remote place thru internet with web server functions which is equipped in DVR.

- ① Select On/Off of DDNS or a domain name to use by using arrow keys and the selection button.
- ② In case of DDNS On, enter the host name and save it then, the registration procedure of the host name proceeds automatically. You can enter the host name with 4-20 letters.
- ③ The host name to enter must not be pre-registered in DDNS sever. Otherwise it won't work.
- ④ The basic host name is the MAC address of appertaining DVR.
- ⑤ In case the host name have entered starts with "000c28", none of MAC address will work excepting for appertaining DVR's.
- ⑥ In case of DynDNS On, enter the host name, user name registered in DynDNS and password then, save them.



- ※ Access to DynDDNS sever(<http://www.dyndns.org>) and apply for the user account then, register the domain name to use and enter URL.
- ※ For more information, please access to the site.

6-6-3 Port

Move to **{Menu} {Setup} {Network} {Port}**.

This feature is used to set the network port.

The default value is between 2000 and 2007; a randomly chosen value can be used depending on the network environment. The Web Server Port is used to connect the DVR remote monitoring. The default value is 80 and a random number over 2000 may also be used.

6-6-4 E-mail

Move to **{Menu} {Setup} {Network} {E-mail}**.

This is to set automatic E-mail transmission service when an event occurs.

To use the e-mail function, {E-mail} in **{Menu} {Setup} {System} {9. Alarm}** and DNS or sub DNS in **{Menu} {Setup} {Network} {Ethernet}** need to be configured.

6-6-5 Bandwidth

Move to **{Menu} {Setup} {Network} {Bandwidth}**.

This sets up the limit of the bandwidth to be used when bringing the live image, adjust resolution/quality and transmitting the data by using the network.

Image Resolution	CIF / 2CIF / 4CIF / HCIF / QCIF
Image Quality	Adjust quality of the image, as the value increases, the compression rate gets higher and image quality gets low. However the transmission rate gets higher.
Bandwidth Limit	You can set the network bandwidth between 40 ~ 4000kbps. As the value increases, the network transmission speed gets faster. Select Off if you do not wish to limit the network bandwidth.

6-6-6 Callback

This is to transmit a signal to Callback server at the remote site and start recording automatically.

- ① This function is available with Callback check box ticked.
- ② Setup items include Callback sever IP, Port No., User ID and Event Type.
- ③ The user can enter IP or URL for Callback sever IP.
- ④ Port No. should be over than 2000 and should not be overlapped with set values at {Setup} -> {Network} -> {Port}.
- ⑤ The user can select one of the registered user at {Setup} -> {System} -> {4. User Registration}.

6-7 System



[Figure 6-47. System Setup Window]

1. DVR Name	Used to name the DVR device.
2. ID For Remote Controller	Used to name the remote controller for running the system.
3. ID For Key Controller	Unique system controller number setting.
4. User Registration	Used to register, add, or delete users.
5. Admin. Password	Used to set the password of the Local System Administrator.
6. Upgrade	Upgrades the system firmware/system setup
7. Factory Setup	Initialize Setup.(Factory default value, except for the network value)
8. RS232C Port	Use of the RS232C port.
9. Alarm	Set the alarm On/Off and alarm format.
10. Alarm Duration	Set the alarm time by continuous/5/10/15/User setting
11. Menu Time Out	Used to set the time for exiting the System Setup menu automatically and displaying the real-time monitoring screen.
12. Language	System OSD language setting


6-7-1 DVR Name

. The initial value is the Mac address. (It supports up to 20 letters for the system name.)

6-7-2 ID for Remote Controller

When multiple devices are used, set the remote controller ID to identify input signals from the remote controller.

	Only the system that DVR ID and remote controller ID match can receive input signals from the remote controller as shown below.
--	---

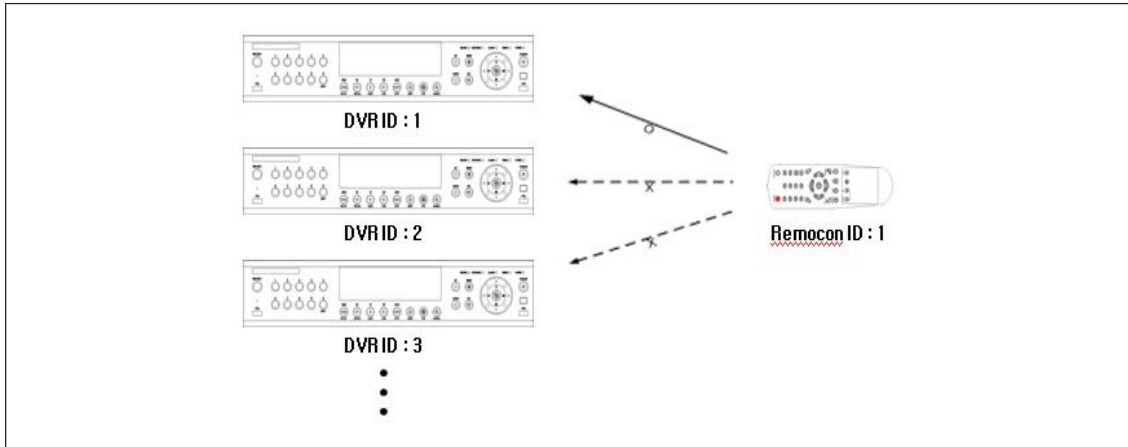

- ① Move to {Menu} {Setup} {System} {2. Remote Controller ID}.
- ② In the selection window, enter ID by using the arrow keys and the Select button (the number 0~99 is available for ID.)

	If you forget the DVR ID, set the remote controller ID to 999 to start the DVR. Note, however, that the DVR ID should be the same as the remote controller ID.
	<p>※ To configure Remote Controller ID (Example: ID setting as 3)</p> <ol style="list-style-type: none"> 1) Press {ID} button on the remote controller. 2) Press the {0} key and {3} key. 3) Press {ID} button again. 4) Remote Controller ID is set as 3.

6-7-3 ID For Keyboard Controller

- ① Move to {Menu} {Setup} {System} {3. ID for Key Controller}.
- ② In the selection window, enter ID by using the arrow keys and the Select button (the number 1~255 is available for ID.)

6-7-4 User Registration

※ Add, edit, or delete the users who will operate the system and give authorities to users as shown below.

System Access Authorization	
Network Live	View the real-time images upon network access.
Playback	View the recorded images.
Copy (download)	Copy and download files.
PTZ camera	PTZ camera control
Setup	Recording, schedule, system, storage, Time, PTZ, network, Screen setup
Network Upgrade	Remote network upgrade
Covert channel monitoring	View the covert channel in the network.



Up to 4 users can be registered. Letters for ID and Password can be entered up to 30.

6-7-5 Admin. Password


Setup the Administrator Password. The password can hold up to five digits.


6-7-6 Upgrade

The firmware and menu setting of the product can be easily upgraded through the use of the external storage devices or portable storage devices with USB 2.0 port.

※ Find and copy the upgrade file to the highest folder in the external storage device or portable storage device supporting USB 2.0.


※ Connect the storage device with an upgrade file stored to USB 2.0 port at Right front panel.

	<p>1) After copying the upgrade file, be advised to get rid of the USB device with safety removal mode from PC.</p> <p>2) If the USB device is disconnected from the USB port while the upgrade file is being copied, the DVR system may not automatically detect the file.</p>
---	---


	<p>Removing USB during the upgrade in progress may cause damage on the system.</p> <p>The system starts over when the upgrade is completed.</p>
---	---

(3) Firmware Upgrade

- ① Select **{Firmware}** and the upgrade file list stored in the selected device and simple version information of the selected file are then displayed. Select a file and Firmware Upgrade window appears.

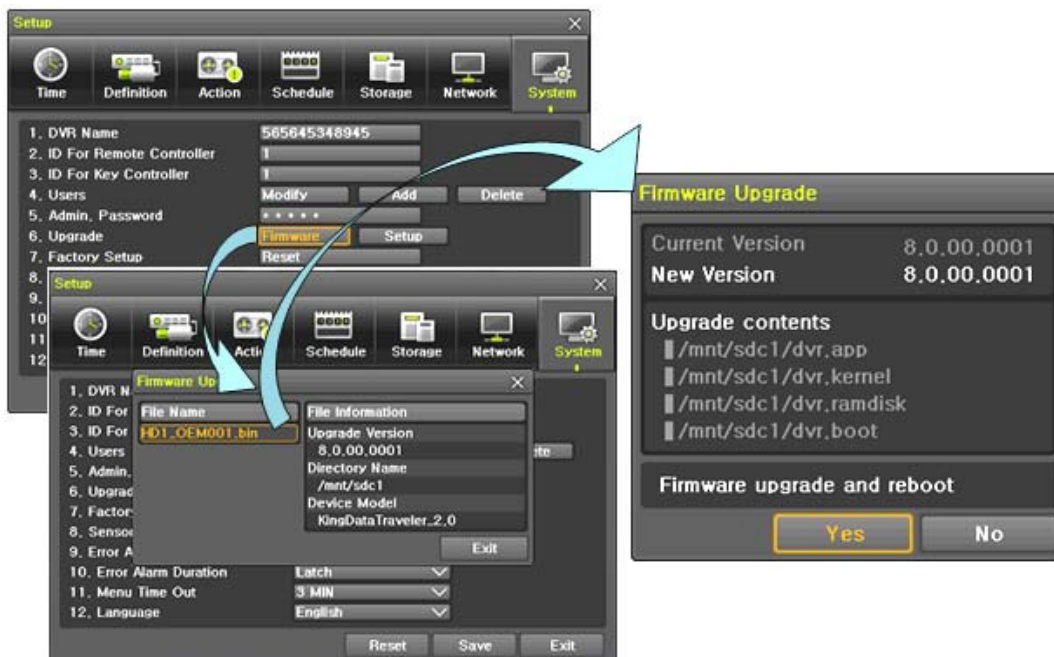


[Figure 6-48. Firmware Upgrade Progressing Window]

	<p>※ Downgrading to a previous version is not supported.</p> <p>※ The upgrade information window will then appear within 15 seconds.</p>
---	--

- ② Read the information and select **{Yes}** to start the upgrade gradually. Select **{No}** to return to the **{System}** mode.
- ③ After the upgrade is completed, the system reboots.
- ④ Move to **{Menu} {Miscellaneous} {DVR Information} {3. Software Version}** to check the version.


(4) Setup Upgrade

- ① Select **{Setup}** and the upgrade file list stored in the selected device and simple version information of the selected file are then displayed.
- ② Select a file and then the upgrade starts immediately.

	<p>Select a file and then the upgrade starts immediately. All setting values of the current menu will be changed to the upgrade setting values.</p>
---	---

6-7-7 Factory Default

- ① Move to **{Menu} {Setup} {System} {7. Factory Setup}**.
- ② Select **{Yes}** when Initialization (Yes/No) Window appears.

	<p>Note that all setting data will be initialized.</p> <p>※ All values go back to Factory Default Value.</p>
---	--


6-7-8 RS232C Port

- ① Move to {Menu} {Setup} {System} {8. RS232C Port}.
- ② On the selection window, select the device by using the arrow keys and the Select button.

6-7-9 Alarm

Alarm is to notify system incidents [Video Signal loss/ HDD full/ FAN fail/ HDD fail/ HDD warning] through [Buzzer/ E-mail/ Relay01/ System check].

Select each [Off/Buzzer/E-mail/Relay01/Popup Window] by ticking.

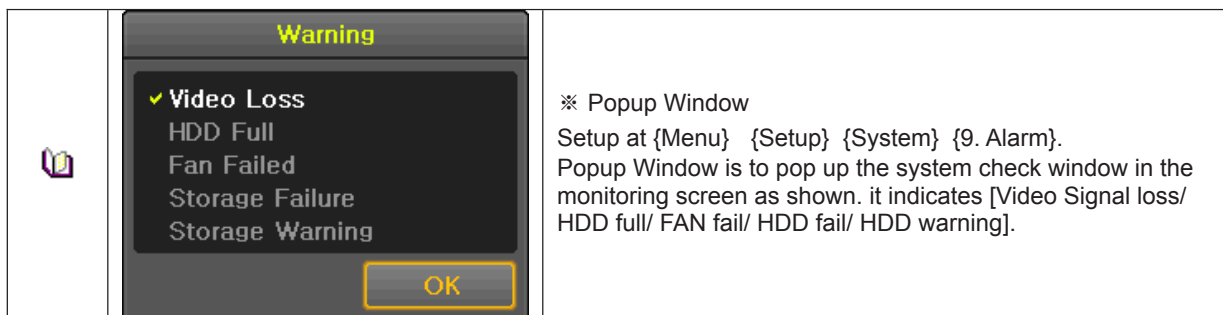

6-7-1 0 Alarm Duration

- ① It sets the duration of the alarm triggered by the recording and system event.
- ② Move to {Menu} {Setup} {System} {10. Alarm Duration}.
- ③ In the selection window, set Alarm Duration by using the arrow keys and the Select button.

6-7-1 1 Menu Time Out

If no input is made in the System Setup menu from the front buttons, remote controller and mouse, the system automatically shifts to the real-time monitoring mode.

- ① Move to {Menu} {Setup} {System} {11. Menu time Out}.
- ② In the selection window, select the time zone you want to set by using the arrow keys and the select button.

Off	The Automatic Menu Exit is not used. ※ The user can exit the menu by pressing the [ESC] button in the System menu.
1/2/3 MIN	If there is no input from the front button, remote controller, or mouse, the system will shift to the real-time monitoring mode.
User Setting	The user can enter the time directly. ※ The time can be set to 1 ~ 60 minutes.

- ③ Selecting the User Setting causes the input window to appear.
- ④ Enter the time by using the numeric buttons or the arrow keys and the Select button.


6-7-1 2 Language

This feature is used to select the language for the On Screen Display (OSD) menu of the system. 17 languages are supported.

APPENDIX

A/P/P/E/N/D/I/X

(1) Recommended HDD Specification

	Type	Size	Capacity	Buffer	RPM
		SATA I, II	3.5" 1, 2 Flat	Up to 1.5TB	over 8MB

(2) Recommended PTZ Camera Protocol

NO	Vendor	Model	Protocol
1	A.D.	ULTRA_7	SENSORMATIC
		ULTRA_8	
2	CHOU	COHU3925	COHU
3	Dongyang	Dongyang	DRX-500
			DY-255
4	DYNACOLOR	DSCP	DSCP
5	EYE VIEW	EYE VIEW	EYE VIEW
6	FINE SYSTEM	CRR-1600i/s	CRR-1600i/s
7	GE	GE	GE_KARATEL
8	GSP	GSP	CYBERSCAN_1
9	HITRON	FASTRAX2	FASTRAX2
10	HONEYWELL	SCANDOME2	HSDN-251
11	LG	LG	LG_MULTIX,
			LG_OLD
12	MIKAMI	MIKAMI	MIKAMI
13	ORIENTAL	ORX-1000	ORX-1000
14	PANASONIC	WVCS854	WVCS854
15	PELCO	PELCO	PELCO - D
			PELCO - P
16	PHILIPS	PHILIPS	PHILIPS
17	PROLINE	PROLINE	PROLINE_UK
18	RIFATRON	RIFATRON-1	RIFATRON
19	SAMSUNG TECHWIN	SAMSUNG	SPD-1600
			SCC641
20	SUNJIN	SUNJIN	SUNJIN
21	VICON	VICON	VICON
22	YOKO	YOKO	YOKO

(3) Recommended USB2.0 Device

USB2.0 Device	Media	File System
Memory Stick	Flash Type	FAT32
2.5" Portable USB HDD	HDD Type	FAT32
CD	CD R, R/W	ISO9660
DVD	DVD +R, +R/W	ISO9660



VEILUX[®]

The Art of Surveillance