


V-WEB SERIES VSIP-8-I

8 Megapixel Network Box Camera with Video Analytics



- Lens not included

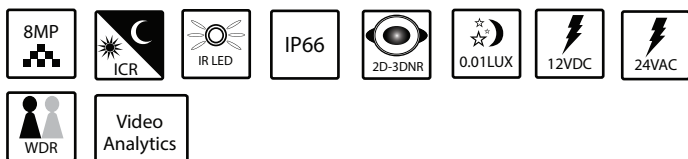

Key Features

- 1/1.9" Progressive Scan CMOS
- 8MP Resolution 4096*2160
- Triple Streams
- 4K Resolution
- PoE
- Onvif 2.4 (Profile S)
- Support HTTPS and multi-level password
- BLC (Back Light Compensation)
- Supports Motion Detection
- WDR more than 100dB
- Day/Night with ICR
- Low bitrate; excellent low light performance
- 2D + 3D DNR (Digital Noise Reduction)
- ROI, Defog, HLC, Corridor mode, DIS
- Basic Video Analytics included
- Advanced Video Analytics (optional)

Specifications	
Image Sensor	1/1.9" Progressive Scan CMOS
Min. Illumination	Color: 0.01Lux (AGC on); B&W: 0.01Lux (AGC on)
Day & Night	ICR
Shutter Speed	1/5-1/20,000
Auto Iris	Yes
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	N/A
FOV	N/A
IR LED	N/A
IR Range	N/A
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main Stream: 500Kb-1200Kb; Sub stream 100Kb-600Kb
Audio Compression	G.711, RAW_PCM
Max. Resolution	4096*2160/25fps
Stream	Stream1: 4096*2160/3840*2160/1920x1080 Stream2: D1 to QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor Mode	Yes
DIS	Auto
ROI	Yes
Defog	Yes
Network	
Network Protocols	HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPoE, Unicast and Multicast supported
Alarm Trigger	Basic: Motion Detection, Line Crossing, Tamper, Area Intrusion, Network Disconnect, Disk Alarm, I/O Alarm Optional Advanced: Motion Detection, Line Crossing, Tamper, Area Intrusion, Camera Move, Dwell, Multiple Dwell, Retrograde Detection, Object left, Object Remove, Abnormal Speed, Illegal Parking, Network Disconnect, Disk Alarm, I/O Alarm
RTSP Video	Standard RFC2326, Support QuickTime/ VLC Player
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Polish, Italian, Portuguese, Spanish, Chinese
System Compatibility	Onvif, CGI

V-WEB SERIES VSIP-8-I

8 Megapixel Network Box Camera with Video Analytics



VEILUX[®]
The Art of Surveillance

Specifications

Interface

Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1ch Audio In & 1ch Audio Out
Alarm I/O	1ch Alarm In & 1ch Alarm Out
RS485	Yes
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC/SDXC slot, max 64GB

General

Power Supply	AC24V/DC12V/PoE
Power Consumption	3W (MAX)
Operating Temperature	(-30°C to 60°C)
Operating Humidity	0%-90% RH
Ingress Protection	N/A
Approvals	CE / FCC
Product Dimensions	142mm(D) x 78mm(W) x 65mm(H)
Product Weight	360g (0.79 lbs)

Dimensions

