

V-WEB SERIES VSIP-4-I

4 Megapixel Network Box Camera with Video Analytics



*Lens not included



Key Features

- 1/3" Progressive Scan CMOS
- Multiple Streams
- Full HD 1080P
- PoE
- ONVIF 2.4 (Profile S)
- Support HTTPS and multi-level password
- BLC (Back Light Compensation)
- Supports Motion Detection
- WDR up to 120dB
- Day/Night with ICR
- Low bitrate; excellent low light performance
- 2D + 3D DNR (Digital Noise Reduction)
- ROI, Defog, HLC, Corridor mode, DIS
- Basic Video Analytics included
- Advanced Video Analytics (optional)

| Specifications | |
|-------------------------|---|
| Image Sensor | 1/3" Progressive Scan CMOS |
| Min. Illumination | Color: 0.01Lux(AGC ON); |
| Day & Night | ICR |
| Shutter Speed | 1-1/33,000 |
| Auto Iris | N/A |
| Wide Dynamic Range | WDR up to 120dB |
| Digital Noise Reduction | 2D/3D |
| Lens | N/A |
| FOV | N/A |
| IR LED | N/A |
| IR Range | N/A |
| IMAGE | |
| Video Compression | H.264 High/Main/Baseline Profile, MJPEG |
| Bit Rate (CBR/VBR) | Main Stream: 500Kb-1200Kb; Sub stream 100Kb-600Kb |
| Audio Compression | G.711, RAW_PCM |
| Max. Resolution | 2,688*1,520/1,440/20fps, 1,920*1,080/30fps |
| Stream | Stream1: 2,688*1,520/1,440/20fps, 1,920*1,080/ Stream2: 720p to QVGA |
| Image Setting | Rotate Mode, Saturation, Brightness, Contrast, Sharpness |
| HLC | Yes |
| 9:16 Corridor Mode | Yes |
| DIS | Auto |
| ROI | Yes |
| Defog | Yes |
| Network | |
| Network Protocols | HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPoE, Unicast and Multicast supported |
| Alarm Trigger | Basic: Motion Detection, Line Crossing, Tamper, Area Intrusion, Network Disconnect, Disk Alarm, I/O Alarm Optional Advanced: Motion Detection, Line Crossing, Tamper, Area Intrusion, Camera Move, Dwell, Multiple Dwell, Retrograde Detection, Object left, Object Remove, Abnormal Speed, Illegal Parking, Network Disconnect, Disk Alarm, I/O Alarm |
| RTSP Video | Standard RFC2326, Support QuickTime/ VLC Player |
| Security | User security authentication, Reset, Hardware WatchDog |
| Web Language | English, Polish, Italian, Portuguese, Spanish, Chinese |
| System Compatibility | ONVIF, CGI |

V-WEB SERIES VSIP-4-I

4 Megapixel Network Box Camera with Video Analytics



Accessories





VCH-619 Housing
Optional: Heater,
Blower, IR



VHM-208
Mounting
Bracket

Dimensions

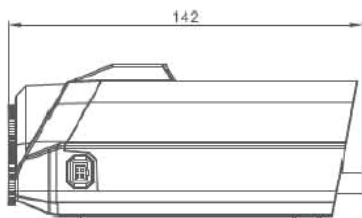

Specifications

Interface

| | |
|--------------|--|
| Ethernet | 1 Ethernet (10/100 Base-T) RJ-45 Connector |
| Audio I/O | 1ch Audio In & 1ch Audio Out |
| Alarm I/O | 1ch Alarm In & 1ch Alarm Out |
| RS485 | Yes |
| BNC Output | Yes |
| Reset Button | Yes |
| Edge Storage | Micro SD/SDHC/SDXC slot, max 64GB |

General

| | |
|-----------------------|---|
| Power Supply | AC24V/DC12V/PoE |
| Power Consumption | 5W max. |
| Operating Temperature | (-30°C to 60°C) |
| Operating Humidity | 0%-90% RH |
| Ingress Protection | N/A |
| Approvals | CE / FCC |
| Product Dimensions | 142mm x 78mm x 65mm (5.59 x 3.07 x 2.55 In.) |
| Product Weight | 360g (0.79 lbs) |