

# V-WEB SERIES VBIP-4E

4MP Network IR Fixed Lens Bullet Camera




**VEILUX**<sup>®</sup>  
The Art of Surveillance



## Features:

- 1/3" Progressive scan CMOS
- 3.6mm fixed lens
- 4MP@20fps
- Multiple streams
- Smart IR up to 35m
- Low bitrate control
- 3D DNR, WDR, ICR
- Support ROI, Corridor mode, HLC

## Dimensions:

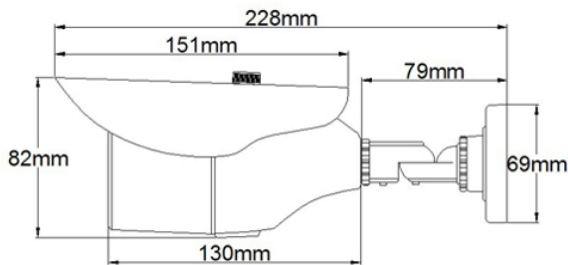

<b>Camera</b>	
<b>Image Sensor</b>	1/3" Progressive Scan CMOS
<b>Min. Illumination</b>	Color :0.05Lux@ (F1.2,AGC ON); B/W: 0 Lux@ (IR LED ON)
<b>Day &amp; Night</b>	ICR
<b>Shutter Speed</b>	1/5-1/20000
<b>Auto Iris</b>	Fixed
<b>Wide Dynamic Range</b>	WDR > 120dB
<b>Digital Noise Reduction</b>	2D/3D
<b>Lens</b>	3.6 mm
<b>FOV</b>	85°
<b>IR LED</b>	24pcs
<b>IR Range</b>	Up to 35m
<b>Image</b>	
<b>Video Compression</b>	H.265/H.264/ MJPEG
<b>Bit Rate (CBR/VBR)</b>	Main stream: 1080P: 500Kbps~12Mbps , 720P: 200Kbps~8Mbps ; Sub stream 100Kbps~6Mbps
<b>Audio Compression</b>	G.711 ,RAW_PCM
<b>Max. Resolution</b>	2592x1520/20fps
<b>Stream</b>	Stream 1 2592x1520/2560x1440/2304x1296/1920x1080/1280x720 Stream 2 D1 to QVGA Stream 3 2592x1520/2560x1440/2304x1296/1920x1080/1280x720/ D1/VGA/ 640 x 360/CIF/QVGA
<b>Image Setting</b>	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
<b>HLC</b>	Yes
<b>9:16 Corridor Mode</b>	Yes
<b>ROI</b>	Yes
<b>Defog</b>	N/A
<b>Network</b>	
<b>Network Protocols</b>	IPv4,802.1x,HTTP/HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast
<b>Alarm Trigger</b>	Motion Detection, Network Disconnect, Disk Alarm
<b>RTSP Video</b>	Standard RFC2326, Support QuickTime / VLC Player.
<b>Security</b>	User security authentication, Reset, Hardware Watch Dog
<b>Web Language</b>	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian
<b>System Compatibility</b>	Onvif
<b>Interface</b>	
<b>Ethernet</b>	1 Ethernet (10/100 Base-T) RJ-45 Connector
<b>Reset Button</b>	N/A
<b>General</b>	
<b>Power Supply</b>	DC12V/POE
<b>Power Consumption</b>	2.5W(IR LED OFF); 5W (IR LED ON)
<b>Operating Temperature</b>	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
<b>Operating Humidity</b>	0% - 90% RH
<b>Ingress Protection</b>	IP-66
<b>Approvals</b>	FCC
<b>Product Dimensions</b>	φ 228 x 69 (Diameter x H) (mm)
<b>Product Weight</b>	520g