

V-WEB SERIES VBIP-4V-E

4MP Network IR Varifocal Lens Bullet Camera




VEILUX[®]
The Art of Surveillance



Features:

- 1/3" Progressive scan CMOS
- 2.8-12mm varifocal lens
- 4MP@20fps
- Multiple streams
- Smart IR up to 35m
- Low bitrate control
- 3D DNR, WDR, ICR
- Support ROI, Corridor mode, HLC

Dimensions:

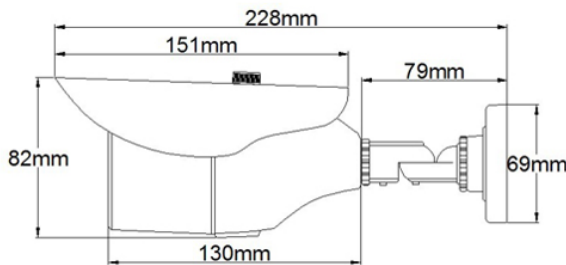

Camera	
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	Color :0.05Lux@ (F1.2,AGC ON); B/W: 0 Lux@ (IR LED ON)
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Fixed
Wide Dynamic Range	WDR > 120dB
Digital Noise Reduction	2D/3D
Lens	2.8-12 mm
FOV	90°-35°
IR LED	24pcs
IR Range	Up to 35m
Image	
Video Compression	H.265/H.264/ MJPEG
Bit Rate (CBR/VBR)	Main stream: 1080P: 500Kbps~12Mbps , 720P: 200Kbps~8Mbps ; Sub stream 100Kbps~6Mbps
Audio Compression	G.711 ,RAW_PCM
Max. Resolution	2592x1520/20fps
Stream	Stream 1 2592x1520/2560x1440/2304x1296/1920x1080/1280x720 Stream 2 D1 to QVGA Stream 3 2592x1520/2560x1440/2304x1296/1920x1080/1280x720/ D1/VGA/ 640 x 360/CIF/QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor Mode	Yes
ROI	Yes
Defog	N/A
Network	
Network Protocols	IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast
Alarm Trigger	Motion Detection, Network Disconnect, Disk Alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware Watch Dog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian
System Compatibility	Onvif
Interface	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Reset Button	N/A
General	
Power Supply	DC12V/POE
Power Consumption	2.5W(IR LED OFF); 5W (IR LED ON)
Operating Temperature	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
Operating Humidity	0% - 90% RH
Ingress Protection	IP-66
Approvals	FCC
Product Dimensions	φ 228 x 69 (Diameter x H) (mm)
Product Weight	520g