

VPRO-NVR-8-QU


8-ch 1 HDD Network Video Recorder



Key Features:

- Support Ultra 265/H.265/H.264 video formats
- 8-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support HDMI and VGA simultaneous output
- Up to 12 Megapixels resolution recording
- 1 SATA HDD up to 10TB
- Support cloud upgrade

Dimensions

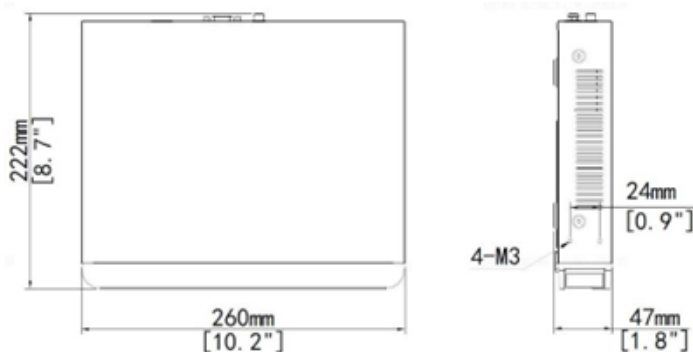

Specifications:

VIDEO/AUDIO INPUT	
IP Video Input	8-ch
Two-way Audio Input	1-ch, RCA
NETWORK	
Incoming Bandwidth	80Mbps
Outgoing Bandwidth	80Mbps
Remote Users	128
Protocols	TCP/IP; P2P; NTP; DHCP; PPPoE; HTTP; HTTPS; DNS; DDNS; SNMP; SMTP; RTSP; IPv6; IPv4
VIDEO/AUDIO OUTPUT	
HDMI Output	4K(3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz,
VGA Output	1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/D1/2CIF/CIF
Audio Output	1-ch, RCA
Corridor Mode Screen	3/4/5/7/9/10
DECODING	
Decoding format	Ultra 265, H.265, H.264
Capability	Smart Off: 2x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30 Smart On: 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
Audio Compression	G.711A, G.711U
HARD DISK	
SATA	1 SATA Interfaces
Capacity	Up to 10TB for each HDD (The maximum HDD capacity varies with environment temperature)
EXTERNAL INTERFACE	
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0
GENERAL	
Power Supply	12V DC
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F) ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	260mm × 222mm × 47mm (10.2"×8.7"×1.8")
Weight (without HDD)	≤ 2Kg (4.4lb)

Rear Panel

