

SVEX-HSF-Z

Air or Water Cooling Explosion Proof Camera Housing




Specifications:

CERTIFICATIONS	
Certificate Mark	Ex d IIC T5 Gb/Ex tD A21 IP68 T95°C
Standards	Q/320412ZAF015-2018
MECHANICAL	
Housing	Stainless steel 304 or 316L
IP	IP68
Cable Thread Hole	2pcs G3/4 or NPT3/4
ELECTRICAL	
Voltage	AC85V~AC265V or DC24V or AC24V
Power	15W
AMBIENT	
Ambient temperature	Air cooling -25 to +150°C , water cooling 0 to +250°C
Water cooling media	Water Flow: 0.3m3/h, ≤35°C pressure 0.1-0.2MPa
Air cooling media	Air Flow: 0.3-0.6m3/min, ≤35°C pressure 0.1-0.2 MPa
Ambient pressure	80Kpa to 106Kpa
Relative Humidity	≤95% (no condensation)
GENERAL	
Size	374*163*185mm
Housing inner size	260*75*75mm
Weight	9.1kg
Mounted	wall, pole

Key Features:

- Applicable for Gas Zone 1 & 2, Dust Zone 21 & 22.
- Stainless steel 304 or 316L enclosure
- Surface optional electro-polished or painting
- Weather Proof IP68
- Strong tempered glass
- Exd IIC T5GB/DIP A20 TA, T5 explosion-proof marking

Dimensions

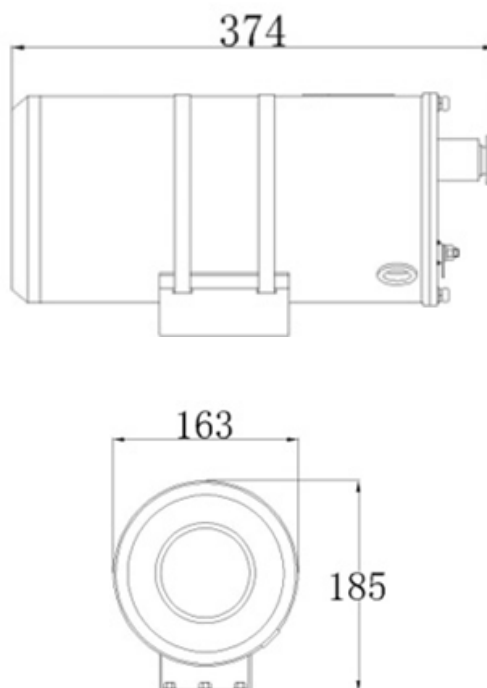

Wall Mount Bracket



(Sold Separately)

GENERAL	
Material	Stainless steel 304 or 316L
Flexible Joint	Yes
Max Loading	100kg
Weight	2.5kg