

# VL-EXL8230-XX


## Explosion Proof Hanging Lamp Large



### Key Features

- Input Voltage: AC100-240V
- Led Source: Cree
- PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120 lm/w
- Anti Corrosion: WF2
- Weight: 2.8 kg / 6.17 lbs
- Size: 180 × 211 mm / 7 x 8.3 in
- Beam Angle: 111.1°
- Ex-proof Grade: ExdIICT6

### Dimensions

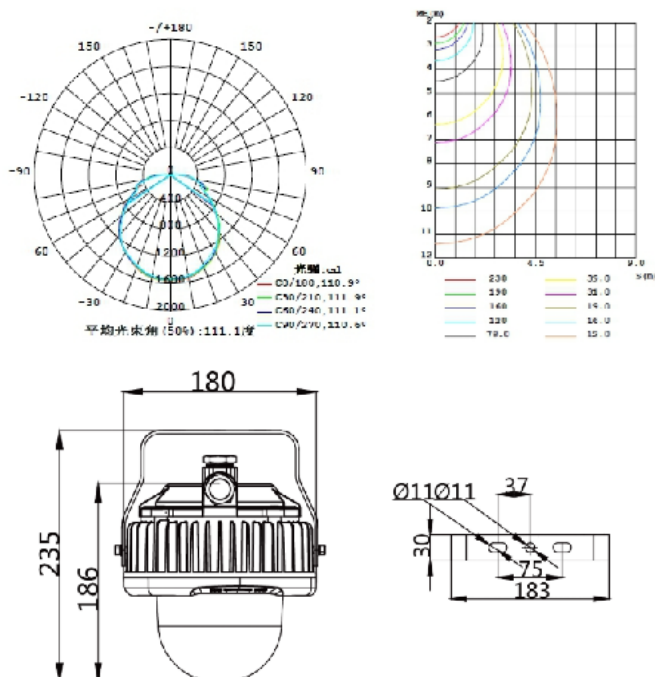

| SPECIFICATIONS              |                           |
|-----------------------------|---------------------------|
| VIDEO INPUT                 |                           |
| Rated Voltage               | AC100-240V                |
| Power                       | 10-45W                    |
| Frequency                   | 50/60Hz                   |
| Light Efficiency            | 120lm                     |
| Power Factor                | >0.95 pf                  |
| Operating Temperature       | -30~50 °C / -22~122 °F    |
| Storage Temperature         | -30~50 °C / -22~122 °F    |
| Protection Level            | IP66                      |
| Lighting Angle              | 110 °                     |
| Light Source                | LED                       |
| Correlate Color Temperature | 3000-6500 k               |
| Color Rendering Index       | ≥70 ra                    |
| LED Qty                     | 45 pcs                    |
| Base Specifications         | CREE3030                  |
| LED'S Operating Life        | 100000 h                  |
| Start-Up Time               | ≤0.2 s                    |
| Anti-Corrosion Grade        | WF2                       |
| Explosion Proof Grade       | ExdIICT6                  |
| Executive Standard          | GB3836.1 / GB3836.2       |
| Weight                      | 2.8 kg / 6.17 lbs         |
| Size                        | 180 × 211 mm / 7 x 8.3 in |

| MODEL         | VOLTAGE |
|---------------|---------|
| VL-EXL8230-20 | 20W     |
| VL-EXL8230-30 | 30W     |
| VL-EXL8230-40 | 40W     |
| VL-EXL8230-45 | 45W     |