

VL-EXS8235-XXX



Explosion proof High Bay Light



Key Features

- Input Voltage: AC100-270v
- Led Source: Cree
- PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120 LM/W
- Anti Corrosion: WF2
- Weight: 4.6 KG / 10.1 LBS
- Size: 356 X 232 MM / 14 X 9.1 IN
- Beam Angle: 89.4°
- Ex-proof Grade: ExdIICT6
- Carton Size: 38.5 × 44.5 × 31.5 CM / 15.1 X 17.5 X 12.4 IN
- Gross Weight: 5.6 KG / 12.3 LBS

Dimensions

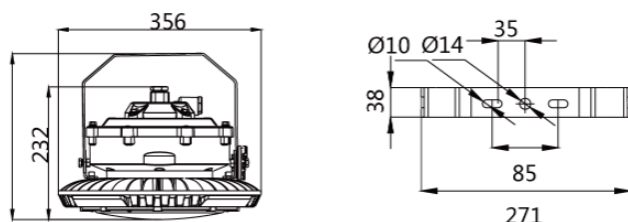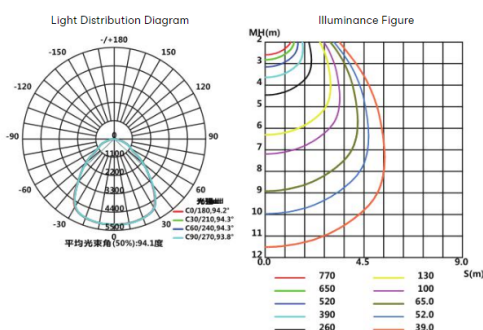

SPECIFICATIONS	
VIDEO INPUT	
Rated Voltage	AC 100-220 V
Power	100-150 W
Frequency	50/60 HZ
Light Efficiency	120 LM
Power Factor	>0.95 PF
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP66
Lighting Angle	95 °
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 RA
LED Qty	150 PCS
Base Specifications	CREE3030
LED'S Operating Life	100000 H
Start-Up Time	≤0.2 S
Anti-Corrosion Grade	WF2
Explosion Proof Grade	ExdIICT6W
Executive Standard	GB3836.1 / GB3836.2
Weight	4.6 KG / 10.1 LBS
Size	356 × 232 MM / 14 X 9.1 IN

Models Available

MODEL	VOLTAGE
VL-EXS8235-100	100W
VL-EXS8235-120	120W
VL-EXS8235-150	150W