

VL-EXT8232-XX

Explosion-Proof Spot Lightwith Lens




VEILUX
The Art of Surveillance



Key Features:

- Input Voltage: AC100-270v
- LED Source: Cree
- PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120 lm/w
- Anti Corrosion: WF2
- Weight: 6.8 kg / 14.9 lbs
- Size: 300 x 236 mm / 11.8" x 9.3" in
- Beam Angle: 14°
- Ex-proof Grade: ExdIICT6
- Carton Size: 32 x 32 x 34.9 cm / 12.5" x 12.5" x 13.7" in
- Gross weight: 7.6kg

Diagram

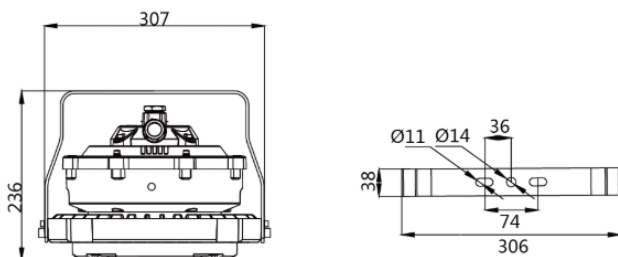

Specifications:

VIDEO INPUT	
Rated Voltage	AC100-220 V
Power	50-90W
Frequency	50/60 HZ
Light Efficiency	120 lm
Power Factor	>0.95 pf
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP66
Lighting Angle	60/90 °
Light Source	LED
Correlate Color Tempera- ture	3000-6500 k
Color Rendering Index	≥70 ra
LED Qty	140 pcs
Base Specifications	CREE3030
LED'S Operating Life	100000 h
Start-Up Time	≤0.2 s
Anticorrosion Grade	WF2
Explosion Proof Grade	ExdIICT6W
Executive Standard	GB3836.1 / GB3836.2
Weight	6.8 kg / 14.9 lbs
Size	307 x 215 mm / 12" x 8.4" in

Models Available

MODEL	VOLTAGE
VL-EXT8232-50	50W
VL-EXT8232-60	60W
VL-EXT8232-80	80W
VL-EXT8232-90	90W

Dimensions

