

VL-EXL-8235-XXX


Explosion proof high bay light



Key Features

- Input Voltage: AC100-270 v
- Led Source: Cree
- PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120 lm/w
- Anti Corrosion: WF2
- Weight: 10.5 kg / 23 lbs
- Size: 415 x 245 mm / 16.3 x 9.6 in
- Beam Angle: 89.4°
- Ex-proof Grade: ExdIICT6

Dimensions

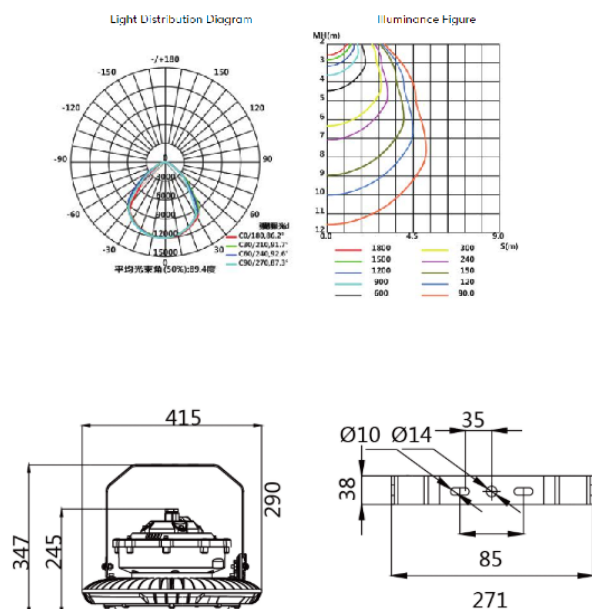

SPECIFICATIONS	
VIDEO INPUT	
Rated Voltage	AC100-270V
Power	150-240 w
Frequency	50/60 hz
Light Efficiency	120 lm
Power Factor	>0.95 pf
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP66
Lighting Angle	110 °
Light Source	led
Correlate Color Temperature	3000-6500 k
Color Rendering Index	≥70 ra
LED Qty	150 pcs
Base Specifications	CREE3030
LED'S Operating Life	100000 h
Start-Up Time	≤0.2 s
Anti-Corrosion Grade	WF2
Explosion Proof Grade	Exd IIC T6 Gb
Executive Standard	GB3836.1 / GB3836.2
Weight	10.5kg / 23lbs
Size	415 × 245 mm / 16.3 x 9.6 inches

Models Available

MODEL	VOLTAGE
VL-EXL8235-150	150W
VL-EXL8235-200	200W
VL-EXL8235-240	240W