

SVEX-HQ60-Z


Explosion Proof PTZ Speed Dome Camera Housing



Key Features:

- ATEX, IECEx certified
- Application: gas zone 1, zone 2; dust zone 21, 22.
- Stainless steel 304 or 316L
- Optional electropolished or corrosion resistant paint finish
- Enclosure Protection: IP66, IP68(2m/2h), IP69
- Power Supply: AC24V/3A±25%, PoE+ (802.3at)
- Suitable for high speed dome cameras
- Indoor, outdoor installation
- Designed for highly corrosive areas

Dimensions

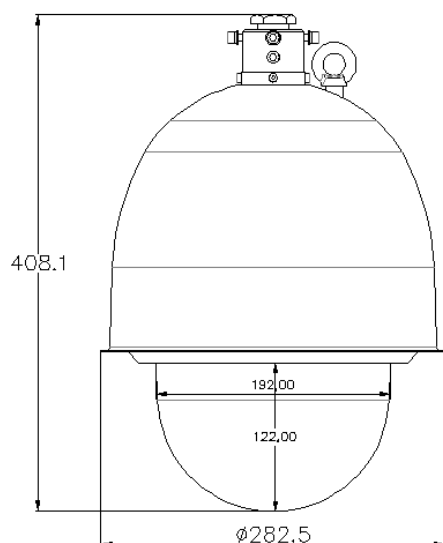

Specifications:

CERTIFICATIONS	
Explosion proof marking	ATEX  II 2 G Ex db IIC T6 Gb  II 2 D Ex tb IIIC T80°C Db
	IECEx Ex db IIC T6 Gb Ex tb IIIC T80°C Db
MECHANICAL	
Type	Dome housing
Housing	Stainless steel 304 or 316L
Cable thread hole	1pcs M27×1.25 or M25×1.5
Ingress Protection	IP66, IP68 (2m, 2h), IP69
ELECTRICAL	
Voltage	AC24V ± 25% or PE+ (802.3at) or 100~240V AC
Power	Less than 75W
AMBIENT	
Ambient temperature	40°C ~ +60°C
Relative Humidity	≤95% RH
Air pressure	80Kpa to 110Kpa
PAN AND TILT	
Pan/Tilt Range	Pan: 0°~360° Tilt: -20°~+90°
Manual Control Speed	Pan: 0.1°/s~300°/s Tilt: 0.1°/s~150°/s
Preset Speed	Pan: 600°/s Tilt: 500°/s
Preset	64/128/255/300
Tour	8 (up to 32 presets per tour)
Pattern Number	5
Scanning Number	5
Speed Adjustment	Support
Power-off Memory	Support
Idle Motion	Preset/Tour/Pattern/Scanning
Protocol	DH-SD Pelco-P/D (auto recognition)
GENERAL	
Cable	Integrated cable
Weight	20 kg (44 lb)
Dimensions	282.5*282.5*408.1mm (11" x 11" x 16")
Mounted	Wall, ceiling