

VL-EX-8190-2



Explosion proof emergency light



Key Features

- Rated Voltage: AC110-270 V
- Charging Time: 48 h
- Discharge Time > 120 min
- Anticorrosion Grade: WF2
- Cable entry: 8mm - 14mm Cable
- Weight: 2.5 kg / 5.5 lbs
- Size: 230 × 260 × 85 mm / 9 × 10 × 3.3 in
- Ex-proof Grade: ExdIIIBT6

Dimensions

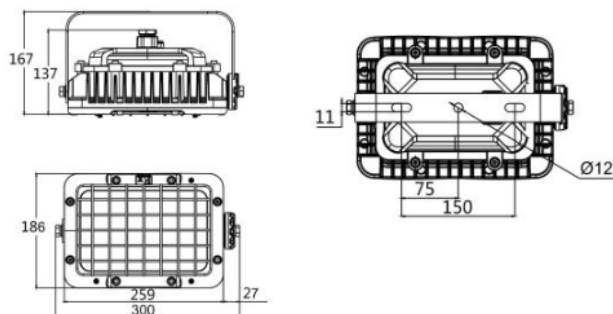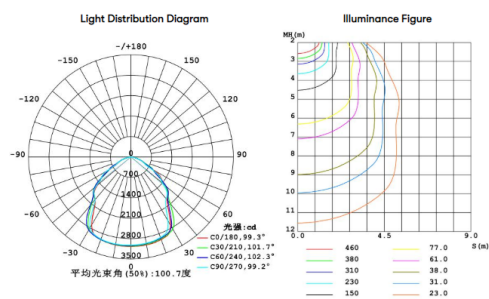

SPECIFICATIONS	
VIDEO INPUT	
Rated Voltage	AC100-220 v
Power	2 w
Frequency	50/60 hz
Light Efficiency	120 lm
Power Factor	>0.95 pf
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP65
Lighting Angle	38 °
Light Source	led
Correlate Color Temperature	3000-6500 k
Color Rendering Index	≥70 ra
LED Qty	2 x 1 pcs
Base Specifications	CREE3030
LED'S Operating Life	100000 h
Start-Up Time	≤0.2 s
Anti-Corrosion Grade	WF2
Explosion Proof Grade	ExdembIIIBT6
Executive Standard	GB3836.1 / GB3836.2
Weight	2.5 kg / 5.5 lbs
Size	230 × 260 × 85 mm / 9 × 10 × 3.3 in