

SVEX-1301-2M36X-ZN


Explosion-proof Thermal PTZ with 36X IP Camera Housing



VEILUX
The Art of Surveillance



Dimensions

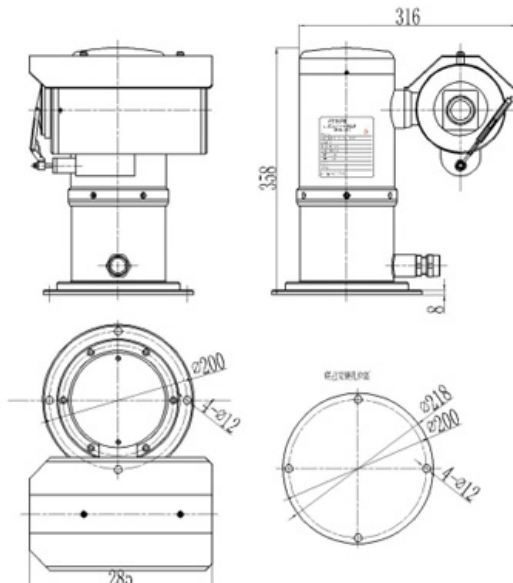

SVEX-1301-2M36X-ZN

Certificate	
Certificate Mark	Exd II C T6 GB/DIP A20 TA T6
Certificate No	CNEx13 3114
Standards	Q/320412 ZAF046-2013
Mechanical	
Housing	Stainless steel 304 or 316L
IP	IP68
Cable thread hole	1pcs G3/4 or NPT3/4
Sun-shield	yes
Electrical	
Voltage	100~240 VAC
Power	50W /70W (with thermostat)
Surge Protect	Optional
Optical Fiber output	Multi mode or signal mode (Optional)
Ambient	
Ambient temperature	-25 to +60℃
Air pressure	80Kpa to 106Kpa
Relative Humidity	<95%(no condensation)
Assistant	
Communication	support analog video output/ IP Output
485 Communication	Support Pelco-D Pelco-P
Communicate Rate	2400 to 19200bps
Pan & Tilt	
Horizontal	360°
Horizontal speed	01-45°/s
Vertical	-90 to +90°
Cruise Scan	Support
Keep watch	Support
Preset	64/128/255/300
Resume function	Support
Auto Cruise	Support
Auto Scan	Support
Optional Alarm	
Alarm Input	2-channel/ 7-channel
Alarm Output	1-channel action with alarm
Intelligent Alarm	Audio detectvie move detectvie video shield network inte

SVEX-1301-2M36X-ZN

Explosion-proof Thermal PTZ with 36X IP Camera Housing




VEILUX
The Art of Surveillance



SVEX-1301ZN-WM

General	
Material	Stainless steel 304 or 316L
Max Loading	100kg
Weight	4.5kg

Dimensions

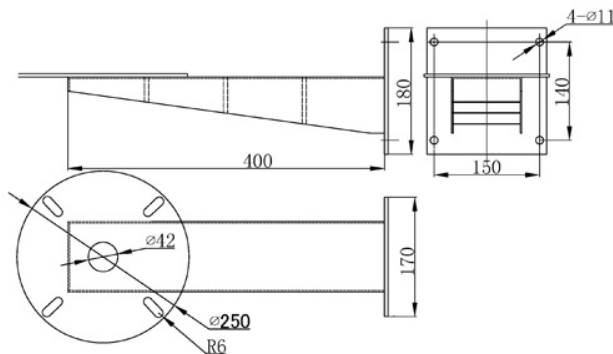

SVEX-1301-2M36X-ZN

Optional Audio	
Audio Input	Audio input (LINE input MIC input) audio peak:2-2 4Vp-p
Audio Output	Line-level impedance 600Ω
Network	
Network Interface	1pcs of RJ45 support 10M/100M/1000M
Video Compression	H 264 main profile / MJPEG
Audio Compression	G 722 1/ G 711-a law/ G7 11-u law/MP2L2/G 726
Voice Intercom	Support
Stream	Support three streams
Internet Protocol	IPv4/IPv6 HTTP HTTPS 802 1x Qos FTP SMTP UPnP SNMP
Time Display	Support
Standard	ONVIF CGI GB/T28181 PISA
IE browser	Support IE7 or above Google Firefox Apple
Security	Password protection Multiple access control
Camera	
Effective pixel	2MP
Lens	4.5~162mm 36x optical
Aperture Range	F1.6-F44
Angle of view	65 1-2 34 degree (wide -tele)
Min Illumination	Color 0.05Lux B/W: 0.01Lux
Day&night	Auto/ Color/ BW
S/N ratio	> 50dB
Gain	off/ lower/ higher
Digital Zoom	12X
White Balance	Auto/ Manual/ Auto tracking white balance/ indoor/outdoor
3D DNR	Support
BLC	ON/OFF
Image setting	Mirror Saturation Brightness Contrast Sharpness adjusta
General	
Cable	integrated cable
Size	316*285*358mm
Weight	23kg
Mounted	wall pole
Wall bracket	SVEX-1301ZN-WM