

VBIP-5Z-PRO-E

5MP Varifocal Motorized Lens IR Bullet Camera




VEILUX[®]
The Art of Surveillance



Key features

- 1/3" 5MP Progressive Scan Sony CMOS
- Max 25/30fps @ 5.0 Megapixels (2592 x 1520)
- H.264& MJPEG dual-stream encoding
- 3D DNR
- Privacy Mask, Motion Detection
- Support Onvif 2.4 protocol
- 2.8~12 mm Motorized Zoom
- 40m IR Range

Dimensions

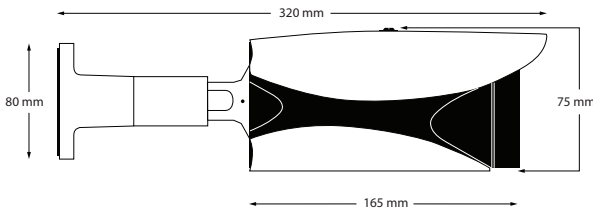

Specifications

Camera	
Image Sensor	1/3" 5MP Progressive Sony CMOS
Min. Illumination	Color: 0.05Lux/F1.2; B/W: 0.01Lux/F1.2
Day & Night	Auto(ICR)/Color/B/W
Shutter Speed	Auto (1/25 ~ 1/10000s)
Auto Iris	Motorized
Wide Dynamic Range	80dB digital WDR
Digital Noise Reduction	3D
Lens	2.8~12 mm Motorized Zoom
IR LED	2pcs IR Array
IR Range	40m
Image	
Video Compression	H.264/MJPEG
Bit Rate (CBR/VBR)Main	32KB ~16Mbps, support VBR, CBR
Audio Compression	G.711 ,RAW_PCM
Max. Resolution	2592 x 1520
Stream	Main Stream: 2592x1520(1~15)/2048x1520/ 1920x1080 (1~25/30fps); Sub Stream VGA/QVGA (1 ~ 25/30fps)
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
Network	
Network Protocols	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP
Alarm Trigger	Manual, Automatic (Motion Detection, Alarm, Schedule, Cycle)
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player
Security	User Security Authentication, Reset, Hardware WatchDog
Web Language	English, Spanish, French, Arabic
System Compatibility	ONVIF 2.4
Interface	
Ethernet	Ethernet (10/100 Base-T) RJ-45 Connector
RS485	N/A
Reset Button	Yes
Edge Storage	N/A
General	
Power Supply	DC12V /520mA
Power Consumption	< 3W
Operation Temperature	-20°C~+55°C
Operating Humidity	Less than 90% RH
Ingress Protection	IP-66
Product Dimensions	87 x 320 x 75 (W x D x H) (mm)
Weight	1.60 lbs