

VL-EX-8231-XX



Explosion proof spot light



Key Features

- Input Voltage: AC 100-270 V
- PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120LM/W
- Anti Corrosion: WF2
- Weight: 3.8 KG / 8.3 LBS
- Size: 230 X 166 MM / 9 X 6.5 IN
- Beam Angle: 14°
- Ex-proof Grade: ExdIICT6
- Carton Size: 26.6 × 26.7 × 28.6 CM / 10.4 X 10.5 X 11.2 IN
- Gross Weight: 4.3 KG / 9.4 LBS

Dimensions

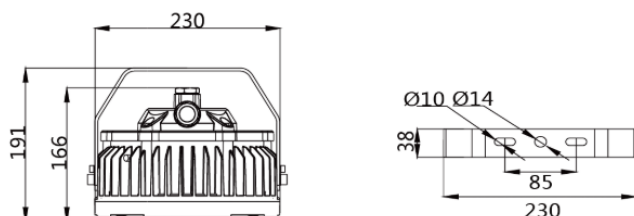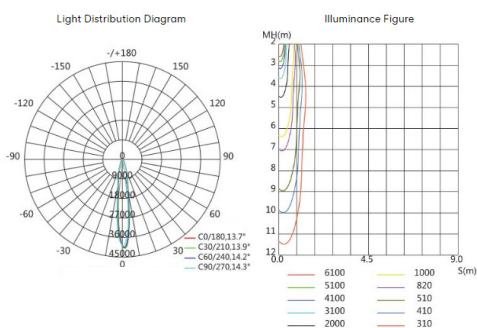

SPECIFICATIONS	
VIDEO INPUT	
Rated Voltage	AC220 V
Power	40-80 W
Frequency	50/60 HZ
Light Efficiency	120 LM
Power Factor	>0.95 PF
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP66
Lighting Angle	20/60/90 °
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 RA
LED Qty	80 PCS
Base Specifications	CREE3030
LED'S Operating Life	100000 H
Start-Up Time	≤0.2 S
Anti-Corrosion Grade	WF2
Explosion Proof Grade	ExdIICT6W
Executive Standard	GB3836.1 / GB3836.2
Weight	5.4 KG / 11.9 LBS
Size	230 × 166 MM / 9 X 6.5 IN