

VL-EX8233LG-XX



Explosion proof hanging lamp



Key Features

- Input Voltage: AC100-270 V
- Led Source: Cree
- PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120 LM/W
- Anti Corrosion: WF2
- Weight: 7.2 KG / 15.8 LBS
- Size: 273 X 389 MM / 10.7 X 15.3 IN
- Beam Angle: 141.9°
- Ex-proof Grade: ExdIICT6

Dimensions

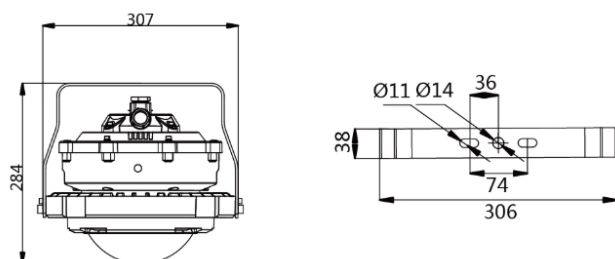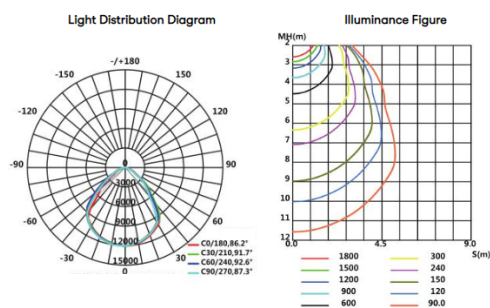

SPECIFICATIONS	
VIDEO INPUT	
Rated Voltage	AC220 V
Power	80-150 W
Frequency	50/60 HZ
Light Efficiency	120 LM
Power Factor	>0.95 PF
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP66
Lighting Angle	140 °
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 RA
LED Qty	155 PCS
Base Specifications	CREE3030
LED'S Operating Life	100000 H
Start-Up Time	≤0.2 S
Anti-Corrosion Grade	WF2
Explosion Proof Grade	ExdIICT6W
Executive Standard	GB3836.1 / GB3836.2
Weight	7.8 KG / 17.1 LBS
Size	306 × 364 MM / 12 X 14.3 IN