

VL-EX8189I-XX



Explosion proof flood lamp



Key Features

- Input Voltage: AC100-270 V
- Led Source: Cree
- PF>0.95 CRI: Ra>75
- IP Rating: IP66
- Lumen Flux: 120 LM/W
- Anti Corrosion: WF2
- Weight: 3.8 KG / 8.3 LBS
- Size: 300 × 186 × 137 MM / 11.8 × 7.3 × 5.3 IN
- Beam Angle: 106°
- Ex-proof Grade: ExdIICT6

Dimensions

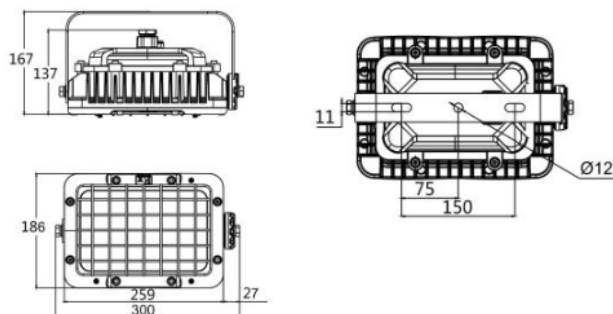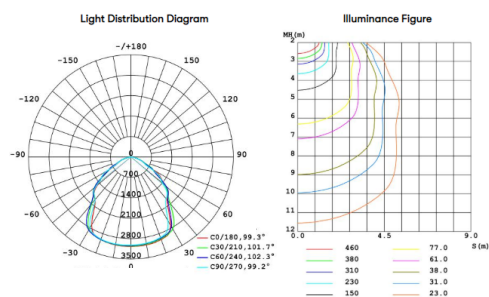

SPECIFICATIONS	
VIDEO INPUT	
Rated Voltage	AC220 V
Power	40-70 W
Frequency	50/60 HZ
Light Efficiency	120 LM
Power Factor	>0.95 PF
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP66
Lighting Angle	15/25/36/45/60/90/120 °
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 RA
LED Qty	95 PCS
Base Specifications	CREE3030
LED'S Operating Life	100000 H
Start-Up Time	≤0.2 S
Anti-Corrosion Grade	WF2
Explosion Proof Grade	EXDEMBIICB T6
Executive Standard	GB3836.1 / GB3836.2
Weight	3.8 KG / 8.3 LBS
Size	300 × 186 × 137 MM / 11.8 × 7.3 × 5.3 IN