

VL-EX8197D


Explosion Proof Fluorescent Double Lamp



Features

- Products can work safely in various flammable and explosive places
- Castaluminium alloy shell, surfacesprayinganti-static, corrosion-resistant, waterproof, dust-proof, can be used in high temperature, humidity and various corrosive harsh environments for a long time
- Transparent toughened glass protective cover, good light transmittance, impact resistance, high light flux, energy saving, environmental protection and other advantages
- Beautiful appearance, simple and reliable structure, easy installation; structural steel pipe or cable wiring can be
- Independent wiring cavity design makes wiring more convenient and fast.

Dimensions

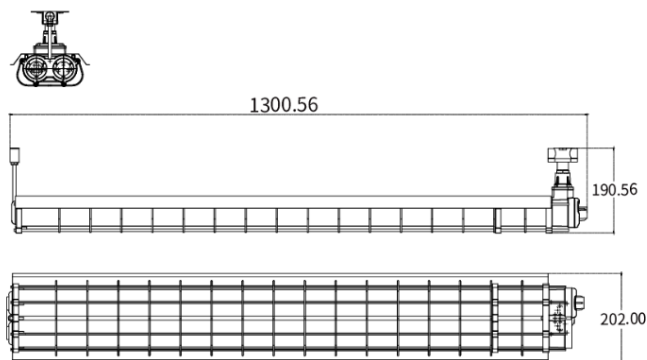

Features

Rated Voltage	AC220 V
Power	2 X 18 / 2 X 36 W
Frequency	50/60 HZ
Light Efficiency	>90 / >120 Lm
Power Factor	>0.95 PF
Protection Level	IP65
Lighting Angle	360°
Light Source	T8 Fluorescent tube / T8 led tube
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 Ra
Light Qty	2 pcs
LED'S Operating Life	50000 h
Start-Up Time	≤ 0.2 s
Anti-Corrosion Grade	WF2
Explosion Proof Grade	ExdIICT6
Executive Standard	GB3836.1 / GB3836.2
Weight	5.4 kg / 11.9 lbs
Size	1280 x 202 x 146 mm / 50" x 7.9" x 5.6" in

MODEL	VOLTAGE
VL-EX8197D-100	100W
VL-EX8197D-270	270W

Install

