

VL-EX8260LP-XXX



Explosion proof flood lamp



Key Features

- Input Voltage: AC100-270 V
- Led Source: Cree
- "PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120LM/W
- Anti Corrosion: WF2
- Weight: 12.5 KG / 27.5 LBS
- Size: 425 X 315 X 165 MM / 16.7 X 12.4 X 6.4 IN
- Beam Angle: 89.4°
- Ex-proof Grade: ExdIICT6
- Carton Size: 50 × 40 × 22 CM / 19.6 X 15.7 X 8.6 IN
- Gross Weight: 13.5 KG / 29.7 LBS

Dimensions

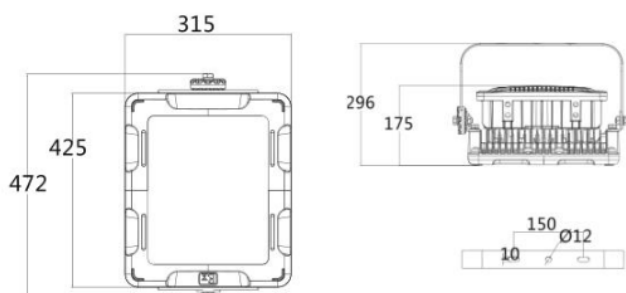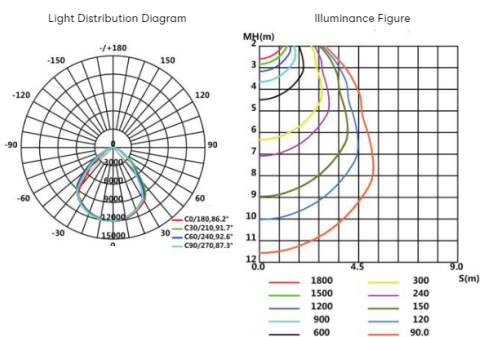

SPECIFICATIONS	
VIDEO INPUT	
Rated Voltage	AC220 V
Power	200-280 W
Frequency	50/60 HZ
Light Efficiency	120 LM
Power Factor	>0.95 PF
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP66
Lighting Angle	90 °
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 RA
LED Qty	250 PCS
Base Specifications	CREE3030
LED'S Operating Life	100000 H
Start-Up Time	≤0.2 S
Anti-Corrosion Grade	WF2
Explosion Proof Grade	ExdIIB T6
Executive Standard	GB3836.1 / GB3836.2
Weight	12.5 KG / 27.5 LBS
Size	472 × 315 × 165 MM / 18.5 X 12.4 X 6.4 IN