

VL-EX8260MP-XXX



Explosion proof flood lamp



Key Features

- Input Voltage: AC100-270 V
- Led Source: Cree
- PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120 LM/W
- Anti Corrosion: WF2
- Weight: 8.9 KG / 19.6 LBS
- Size: 374 X 276 X 171 MM / 14.7 X 10.8 X 6.73 IN
- Beam Angle: 106.5°
- Ex-proof Grade: ExdIICT6
- Carton Size: 39.5 × 35 × 21.5 CM / 15.5 X 13.7 X 8.4 IN
- Gross Weight: 10 KG / 22 LBS

Dimensions

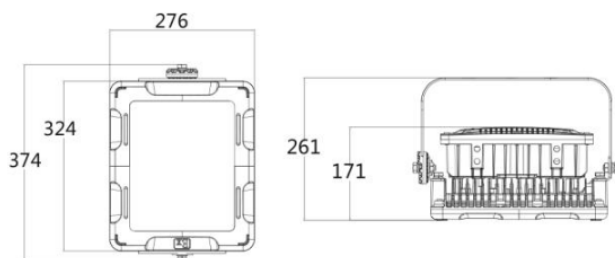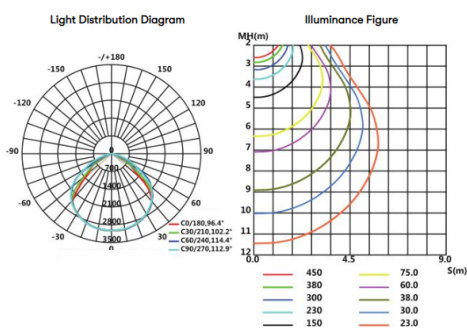

SPECIFICATIONS	
VIDEO INPUT	
Rated Voltage	AC220 V
Power	70-200 W
Frequency	50/60 HZ
Light Efficiency	120 LM
Power Factor	>0.95 PF
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP66
Lighting Angle	110 °
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 RA
LED Qty	180 PCS
Base Specifications	CREE3030
LED'S Operating Life	100000 H
Start-Up Time	≤0.2 S
Anti-Corrosion Grade	WF2
Explosion Proof Grade	ExdIIIB T6
Executive Standard	GB3836.1 / GB3836.2
Weight	8.9 KG / 19.6 LBS
Size	374 × 276 × 171 MM / 14.7 X 10.8 X 6.73 IN