

VL-EXL8230-XX


Explosion Proof Hanging Lamp



Key Features

- Protection Grade: IP66
- Anti Corrosion: WF2
- Weight: 1.4 KG / 3 LBS
- Lumen Flux: 120 LM/W
- Gross Weight: 1.75 KG / 3.8 LBS
- PF>0.95 CRI: Ra>75
- Input Voltage: AC100-270 V
- Led Source: Cree
- Size: 145 X 130MM / 5.7 X 5.1 IN
- Beam Angle: 45°/60°/90°/120°
- Ex-proof Grade: ExdIICT6
- Carton Size: 20.5 × 20.5 × 21 CM / 8 X 8 X 8.2 IN

Dimensions

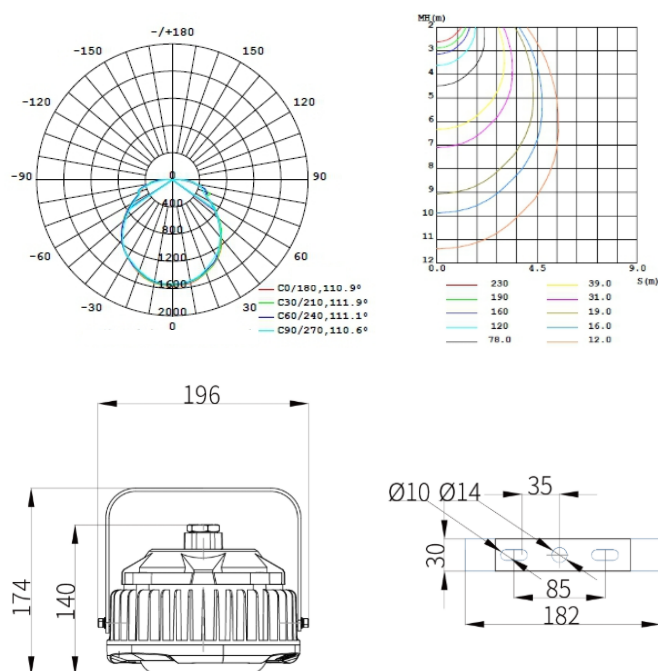

SPECIFICATIONS	
VIDEO INPUT	
Rated Voltage	AC220 V
Power	10-45 W
Frequency	50/60 HZ
Light Efficiency	120 LM
Power Factor	>0.95 PF
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP66
Lighting Angle	110 °
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 RA
LED Qty	45 PCS
Base Specifications	CREE3030
LED'S Operating Life	100000 H
Start-Up Time	≤0.2 S
Anti-Corrosion Grade	WF2
Explosion Proof Grade	ExdIICT6W
Executive Standard	GB3836.1 / GB3836.2
Weight	2.5 KG / 5.5 LBS
Size	180 × 148 MM / 7 X 5.8 IN