

VL-EXL8230-XX



Explosion Proof Hanging Lamp Large



Key Features

- Input Voltage: AC100 - 270 v
- Led Source: Cree
- PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120 lm/w
- Anti Corrosion: WF2
- Weight: 2.5 kg / 5.5 lbs
- Size: 180 x 148 mm / 7 x 5.8 in
- Beam Angle: 111.1°
- Ex-proof Grade: ExdIICT6
- Gross Weight: 3.6kg (8lbs)

Dimensions

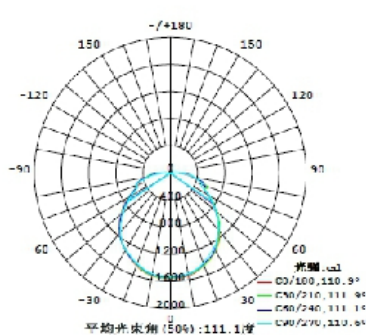

SPECIFICATIONS	
VIDEO INPUT	
Rated Voltage	AC110-220V
Power	10-45W
Frequency	50/60Hz
Light Efficiency	120lm
Power Factor	>0.95 pf
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP66
Lighting Angle	110 °
Light Source	LED
Correlate Color Temperature	3000-6500 k
Color Rendering Index	≥70 ra
LED Qty	60 pcs
Bae Specifications	CREE3030
LED'S Operating Life	100000 h
Start-Up Time	≤0.2 s
Anti-Corrosion Grade	WF2
Explosion Proof Grade	ExdIICT6W
Executive Standard	GB3836.1 / GB3836.2
Weight	2.8 kg / 6.17 lbs
Size	180 × 148mm / 7 x 5.8 in

MODEL	VOLTAGE
VL-EXL8230-10/20	10/20W
VL-EXL8230-30	30W
VL-EXL8230-40	40W
VL-EXL8230-45	45W