

VL-EXSP-8260-XXX

Explosion Proof Mid-size Split Mode Flood Lamp




Features

- Input Voltage: AC100-270 V
- LED Source: Cree
- PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120lm/w
- Anticorrosion: WF2
- Weight: 4.8 kg / 10.5 lbs
- Size: 300 x 186 x 174 mm / 11.8" x 7.3" x 6.8" in.
- Beam Angle: 106°
- Ex-proof Grade: ExdIICT6
- Carton Size: 51.4 x 33.6 x 24 cm / 20" x 13.2" x 9.4" in.
- Gross Weight: 10 kg / 22 lbs

Models Available

| | |
|--------------------|---------|
| VL-EXSP-8260-80100 | 80-100w |
| VL-EXSP-8260-120 | 120W |
| VL-EXSP-8260-150 | 150W |
| VL-EXSP-8260-190 | 190W |

Diagram

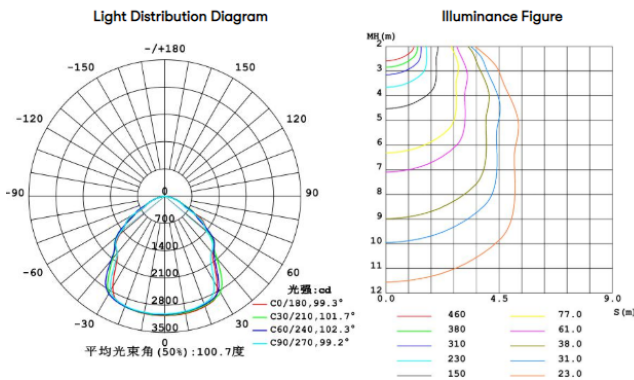

Specifications

| VIDEO INPUT | |
|-----------------------------|---|
| Rated Voltage | AC220V |
| Power | 70-100W |
| Frequency | 50/60 hz |
| Light Efficiency | 120 lm |
| Power Factor | >0.95 pf |
| Operating Temperature | -30°C ~ 50°C / -22°F~122°F |
| Storage Temperature | -30°C ~50°C / -22°F~122°F |
| Protection Level | IP66 |
| Lighting Angle | 15/25/36/45/60/90/120 ° |
| Light Source | LED |
| Correlate Color Temperature | 3000-6500 k |
| Color Rendering Index | ≥70 ra |
| LED Qty | 95 pcs |
| Base Specifications | CREE3030 |
| LED'S Operating Life | 100000 h |
| Start-Up Time | ≤0.2 s |
| Anti-Corrosion Grade | WF2 |
| Explosion Proof Grade | ExdIIB T6 |
| Executive Standard | GB3836.1 / GB3836.2 |
| Weight | 4.8 kg / 10.5 lbs |
| Size | 299 x 186 x 174 mm / 11.7" x 7.3" x 6.8" in |

Dimensions

