

PRO SERIES

VPRO-NVR-32-8H-UG -V

32 Channel Network Video Recorder



Technical Datasheet

Category	Specification
Model	VPRO-NVR-32-8H-UG -V
IP Video Input	32-ch
Audio Input	1-ch, RCA
Incoming bandwidth	320Mbps
Outgoing bandwidth	320Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS, RTSP, 802.1x, IPV6 Support mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T)
Browser	IE(IE10/11) for Windows Firefox (version 52.0 and above) for Windows Chrome (version 45 and above) for Windows Edge(version 79 and above) for Windows
HDMI Output	HDMI:4K(3840x2160)/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz,1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
VGA Output	VGA:1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz,1280x720/60Hz, 1024x768/60Hz
Recording Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/D1/2CIF/CIF
Audio Output	1-ch, RCA
Audio Compression	G.711A, G.711U
Synchronous Playback	16-ch
Live View Display	1/4/6/8/9/16/25/36
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
FTP/Schedule/Event	4-ch snapshot, up to D1 resolution
Decoding Format	Ultra 265/H.265/H.264
Live View/Playback	32MP/12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30,8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30, 32 x 960P@25H.264: 2 x 16MP(4800*2688)@30, 2 x 12MP@30, 2 x 4K@30, 4 x 5MP@30, 6 x 4MP@30, 8 x 3MP@30, 14 x 1080P@30, 28 x 960P@25, 30 x 720P@30, 32 x D1
SATA	8 SATA interfaces
Capacity	Up to 24TB for each disk
Disk Group	Support
Disk Array Type	RAID 1, 5

Veilux Inc.

802 Greenview Dr. Ste 200, Grand Prairie TX 75050 USA Direct: (+1) 214-635-4855
sales@veilux.net or Visit Us at www.Veilux.net



Made in the USA


PRO SERIES

VPRO-NVR-32-8H-UG -V

32 Channel Network Video Recorder



VCA Detection by Camera	Face Detection; Vehicle Detection; SIP(Intrusion Detection, Cross Line Detection, EnterArea, Leave Area); Ultra Motion Detection(UMD); Temperature Detection(Fire Detection,Smoking Detection, Temperature Measurement, Smoke and Fire Detection); People Counting(People Flow Counting, Crowd Density Monitor-ing); Video Metadata; TrafficMonitoring
VCA Search	Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report, Heat Map
Smart by IPC	All channels (up to 8 images/s in total)Face Detection, Vehicle Detection, Temperature Detection, SIP, UMD, Video Metadata, Traffic Monitoring
General Alarm	Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion, Tampering, Human Body Detection, Video Loss, Alarm Input, Audio Detection
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline , Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Front: 2 x USB2.0, Rear panel: 1 x USB3.0
RS232	1
Alarm In	32-ch
Alarm Out	4-ch
Power Supply	100~240V AC Power Consumption: ≤ 32W (without HDD)
Working Environment	-40°C~+ 70°C Humidity ≤ 90% RH (non-condensing)
Dimensions (LxWxH)	442mm x 426mm x 89mm (17.4" x 16.8" x 3.5")

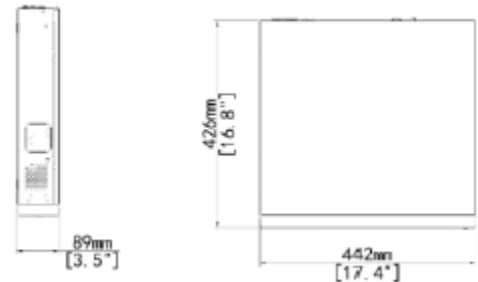

Veilux Inc.
 802 Greenview Dr. Ste 200, Grand Prairie TX 75050 USA Direct: (+1) 214-635-4855
 sales@veilux.net or Visit Us at www.Veilux.net



Made in the USA