

VL-EXMP-8260-XXX


Explosion Proof Medium Sized LED Flood Lamp



Features

- Configuration: The LED light source has an average service life of up to 100,000 hours. The power supply adopts wide voltage processing, which can realize constant current output, and has short-circuit and over-voltage protection functions, which can prolong the service life of the lamps.
- Heat dissipation: explosion-proof electrical box and lamp holder double cavity design and large space size ensure the assembly of various large-scale electrical appliances. Excellent heat dissipation performance, so the LED chip and power supply temperature rise is controlled.
- Transparent parts: Excellent light projection, the light is even and soft, making it suitable for a number of solutions where lighting, floodlights are needed as fixed lighting.
- Protection: Ingress protection for this lamp body is rated IP66, and the anticorrosion level can reach up to WF2. The surface of the lamp body will not corrode and rust.
- Installation method: Various installation methods such as ceiling, suction wall and U-shaped anti-vibration bracket (angle adjustable) can be used as needed.

Diagram

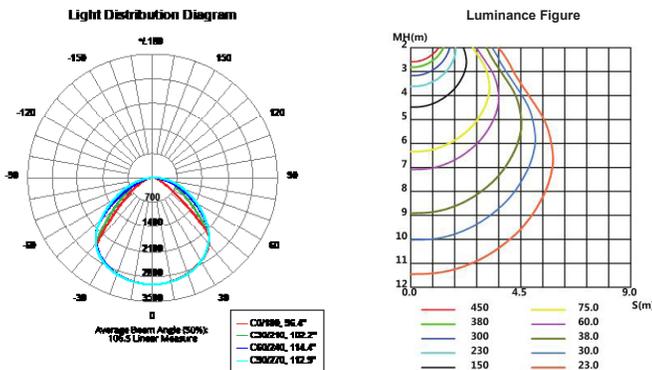

Specification

Luminous Efficacy	120 LM/W
CRI	75 Ra
Lamp Luminous Flux	1200 LM
IP Rating	IP66
Working Lifetime (Hr)	100000
Working Temperature	-30°C - 60°C
Certification	CCC, ce, EMC, FCC, LVD, RoHS, Saa
Light Source	LED
Driver	DONE / O-srams
Warranty	3 Years / 5 Years
Ex Code	Ex d IIC T6
Ip Grade	IP66
Certificates	ATEX, CE, ROHS
Dimensions	395 x 350 x 215 mm / 15.6" x 13.8" x 8.5" in.
Weight	10kg / 2.2 lbs
Lamp Luminous Efficiency	120 LM/W
Input Voltage	AC100-240V
Lamp Power	100
Selling Units	Multiple of 4
Package Size	40 x 35 x 22 cm / 15.7" x 13.8" x 8.7" in.

Models Available

MODEL	VOLTAGE
VL-EX8260-80100	80-100W
VL-EX8260-120	120W
VL-EX8260-150	150W
VL-EX8260-190	190W

Dimensions

