

VP-AHD-2MIR10X

1080P HD Analogue IR Mini PTZ




VEILUX
The Art of Surveillance



Key features

- Powerful 10x optical zoom
- AHD Lossless video output
- Max.25/30fps@1080p resolution
- DWDR, Day/Night(ICR), DNR (2D&3D),Auto iris, Auto focus, AWB, AGC,BLC
- OSD menu with humanized design, easy for operation
- Max 45°/s pan speed, 360° endless rotation
- Up to 128 presets, 4 auto scan, 4 tour, 4 pattern, clock functions
- Support UTC

Dimensions

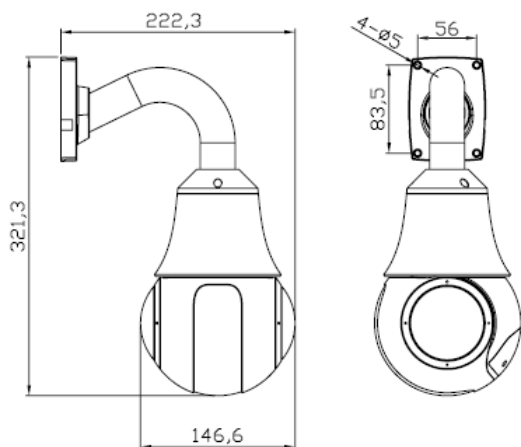

Specifications

CAMERA	
Image Sensor	1/2.9" SONY CMOS Sensor
Resolution	1080P, 1100 TVL
Effective Pixels	1920(H)*1080(V)
S/N Ratio	>58db
TV System	PAL/NTSC
OPTICS	10X Optical Zoom ,Zoom f=5.1mm~51mm
Angle	Appr.55.2° (Wide) to 3.2° (Tele)
Min. illumination	Color :0.1lux,BW :0.01lux
Wide Dynamic Range	dWDR
White Balance	Auto
ICR	Manual/Auto
DNR	Auto/Off/Low/Middle/High
BLC	Support
Max Gain	Auto
IRIS	Auto
OSD	Support
IR LED	4pcs
IR Range	50m
IMAGE	
Rotation	Pan continuously 360° , tilt 0~90° with auto-flip
Manual speed	Pan (0.1° ~200° /s) \Tilt (0.1° ~180° /s)
Preset speed	45°/S
Auto Flip	Horizontal 180°, Vertical 93°
Preset	128 preset
Scan	4 scan
Guard Tours	4 tour
Communication	Control over coaxial & RS485 (Pelco-D, Pelco-P)
GENERAL	
Power Supply	Standard DC12V/2.7A
Power Consumption	≤20W
Temperature	-10℃~+50℃
Operating Humidity	0~95% (Non-condensation)
Protection grade	IP66,1500V Lightning-proof, Surge-proof
Product Weight	2.3KG

Veilux Inc

802 Greenview Dr. Suite 200, Grand Prairie TX. 75050 USA

Toll Free: 1-800-510-6528 Direct: (+1) 214 635-4855

Fax: (+1) 214 988-2858 sales@veilux.net www.veilux.net